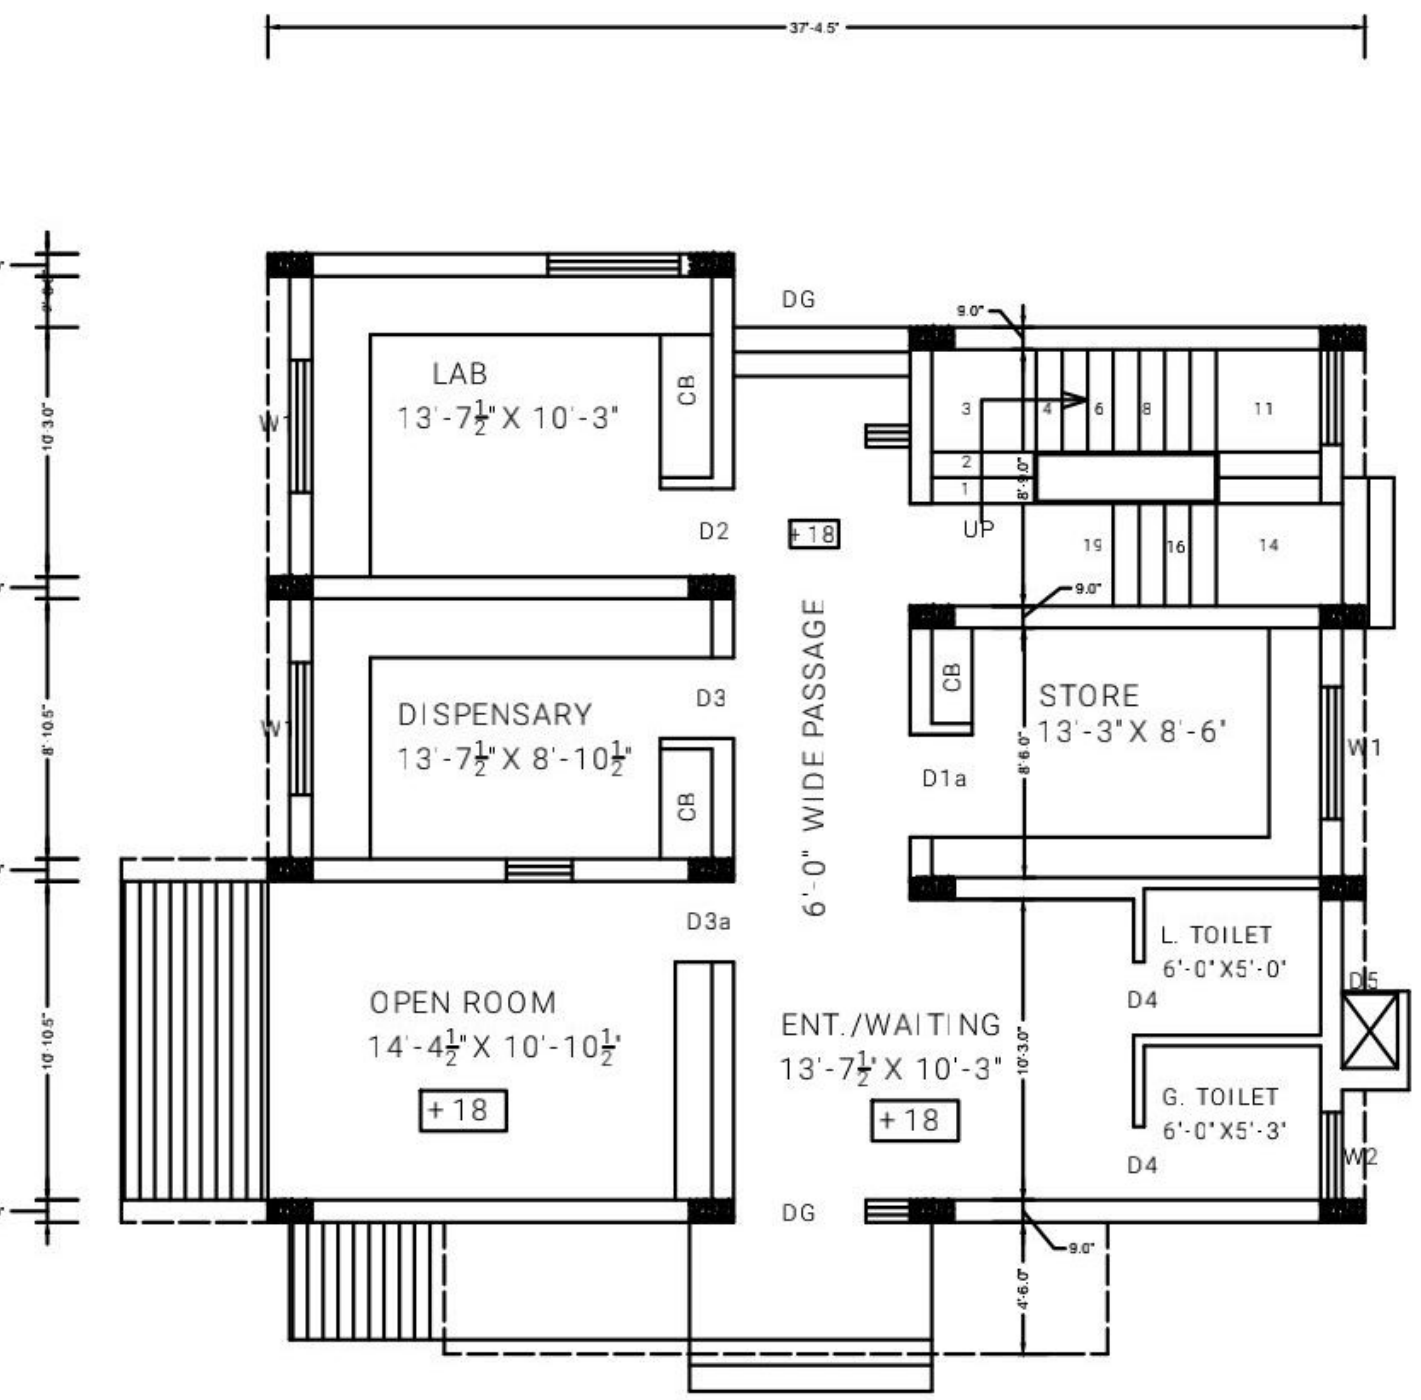

GROUND FLOOR PLAN

G.F.AREA= 1198 SQ.FT
TOTAL AREA(G.F.+F.F.)= 1350 SQ.FT

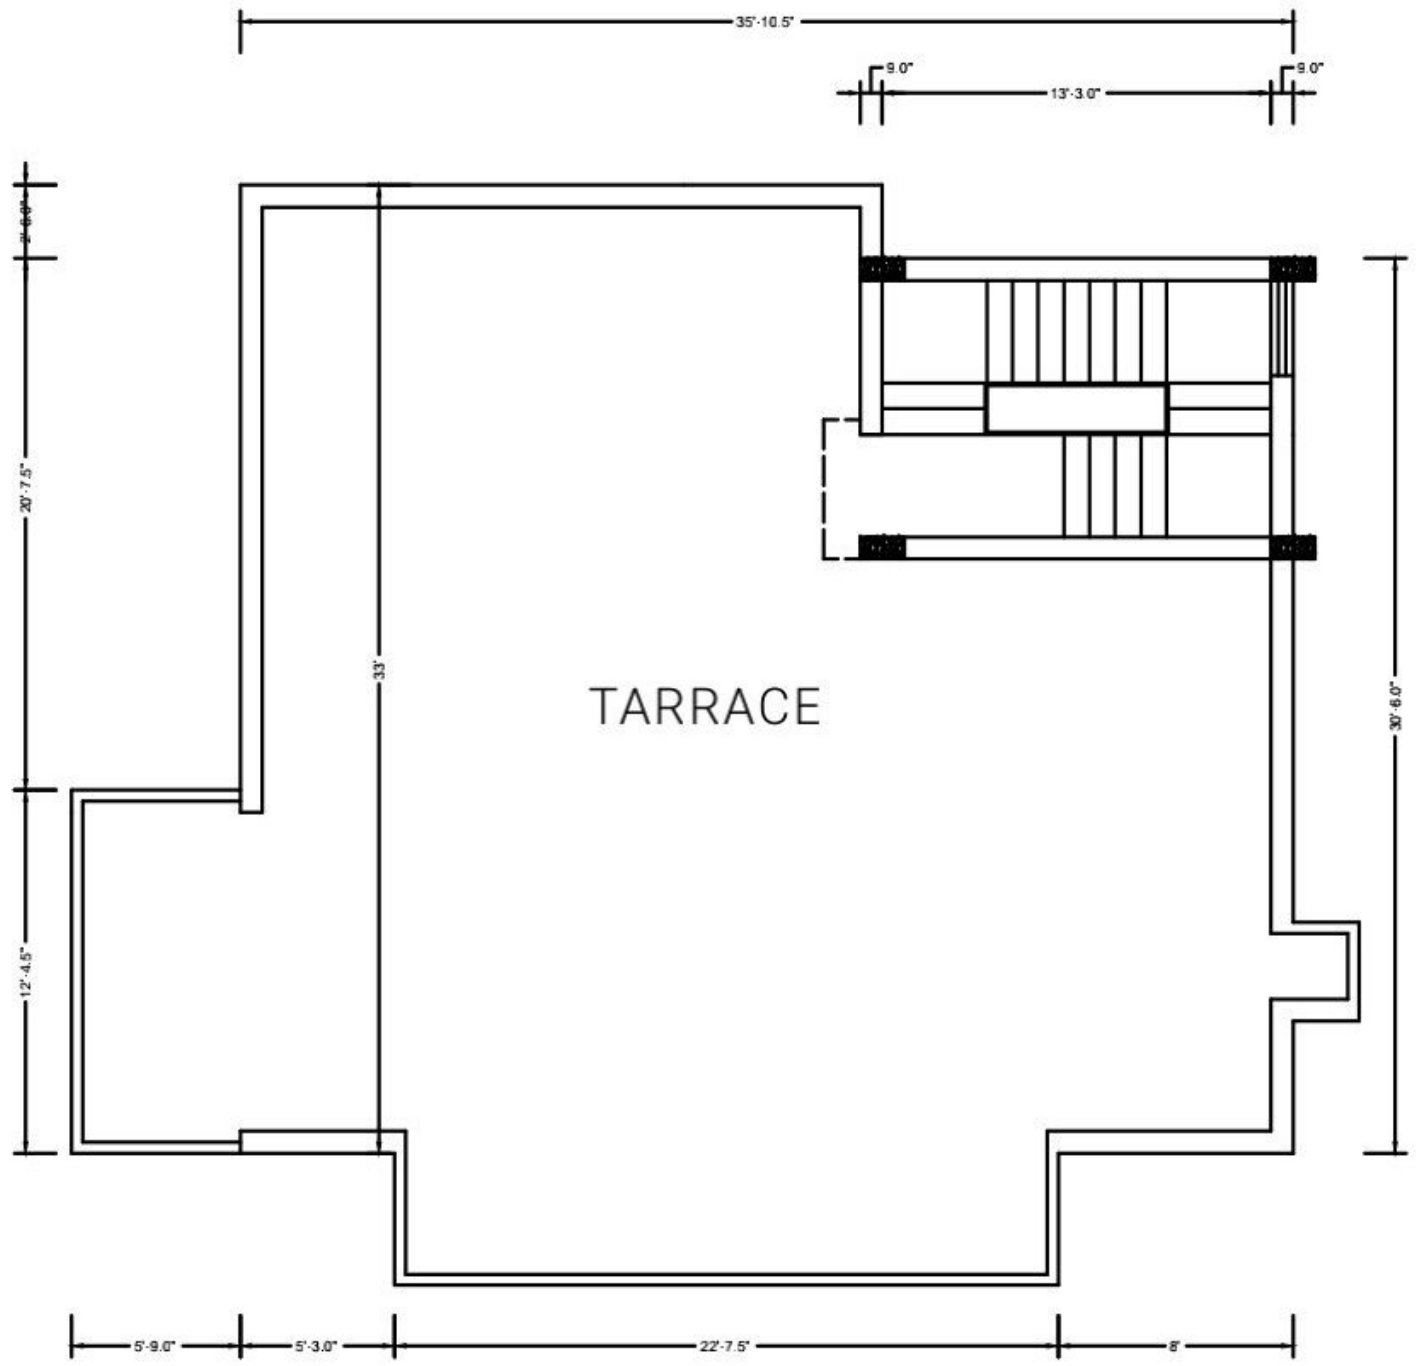

TARRACE PLAN

F.F.AREA= 152 SQ.FT

SPECIFICATION

1. ALL THE STRUCTURE WILL BRICK MASONARY IN CEMENT SAND MORTOR IN FOUNDATION AND SUPER STRUCTURE.
2. R.C.C. ROOF SLAB, FASCIA, COLUMNS, BEAMS, LINTELS AND RCC SHELVES IN CUPBOARDS.
3. WATERPROOFING TREATMENT ON ROOF SLAB.
4. 40 MM THICK CEMENT CONCRETE 1:2:4 TOPPING OVER BASE COURSE OF FLOOR.
5. VITRIFIED TILES 600mmX600mm ON FLOOR IN DISPENSARY, BEDROOMS.
6. KOTAH STONE FLOORING IN STAIR STEPS LANDING WAITING AND ENTRANCE CORRIDORS WITH SKIRTING.
7. ANTI SKID FLOORING IN KITCHEN, LAB, TOILETS, ETC WITH GLAZED TILES ON WALLS 6'-9" HIGH IN TOILETS.
8. PRESSED STEEL FRAMED CHOWKATS FOR DOORS AND WINDOWS.
9. SOLD FLUSH DOOR SHUTTERS AND CUPBOARDS SHUTTERS WIREGAUGE SHUTTERS ON EXTERNAL DOORS AND WINDOWS, GLAZED WINDOWS IN ALL ROOMS, DULY PAINTED WITH SYNTHETIC PAINT.
10. PRESSED STEEL FRAMED CHOWKATS FOR DOORS AND WINDOWS.
11. TILE TERRACING ON ROOF WITH 19MM THICK HEAT RESISTING TILES.
12. BARODA GREEN MARBLE ON SHELVES OF LAB, KITCHEN, DISPENSORY.
13. GRC TILES WITH GROOVE ON EXTERNAL FRONT WALL SURFACE.
14. STAINLESS STEEL RAILING IN STAIRCASE.
15. PRESSED CHEQURED TILES ON PLINTH PROTECTION AROUND THE BUILDING 3' WIDE.
16. BOUNDARY WALL WITH CEMENT MORTAR 6' HIGH AND 1.20 MTR. FENCING WITH ANGLE IRON PARTS AND MS STEEL GATE DUTY PAINTED.
17. CEMENT CONCRETE 1:1 ½: 3 PAVEMENT ON ROAD AND PARKING.
18. ALL CONDUCT WIRING FOR RI WORK MODERN SWITCHES ETC.

SHEDULE OF JOINERY

S.No.	NAME	SIZE	CILL	TOP	RMKS
1	DG	6'-0"X8'-3"	0'-0"	8'-3"	
2	D1	3'-6"X8'-3"	0'-0"	8'-3"	
3	D1a	3'-6"X7'-0"	0'-0"	7'-0"	
4	D2	3'-0"X7'-0"	0'-0"	7'-0"	
5	D3	2'-9"X7'-0"	0'-0"	7'-0"	SWING DOOR
6	D3a	2'-9"X7'-0"	0'-0"	7'-0"	SWING DOOR
7	D4	2'-6"X7'-0"	0'-0"	7'-0"	
8	D5	1'-10½"X7'-0"	0'-0"	7'-0"	
9	W	6'-0"X5'-0"	3'-3"	8'-3"	
10	W1	5'-6"X5'-0"	3'-3"	8'-3"	
11	W2	3'-0"X3'-0"	4'-6"	8'-3"	
12	W3	3'-3"X5'-0"	3'-3"	8'-3"	
13	S.W.	2'-3"X2'-3"	2'-9"	8'-0"	

REVISIONS

S.NO.	DATE	DESCRIPTION	RKS

NOTE:

1. IN CASE OF ANY DISCREPANCY IN THE DRGS. MUST BE BROUGHT TO BE NOTICE OF THE CONCERNED ARCHITECT/DEPTT. IMMEDIATELY BEFORE TAKING ACTION AT SITE.

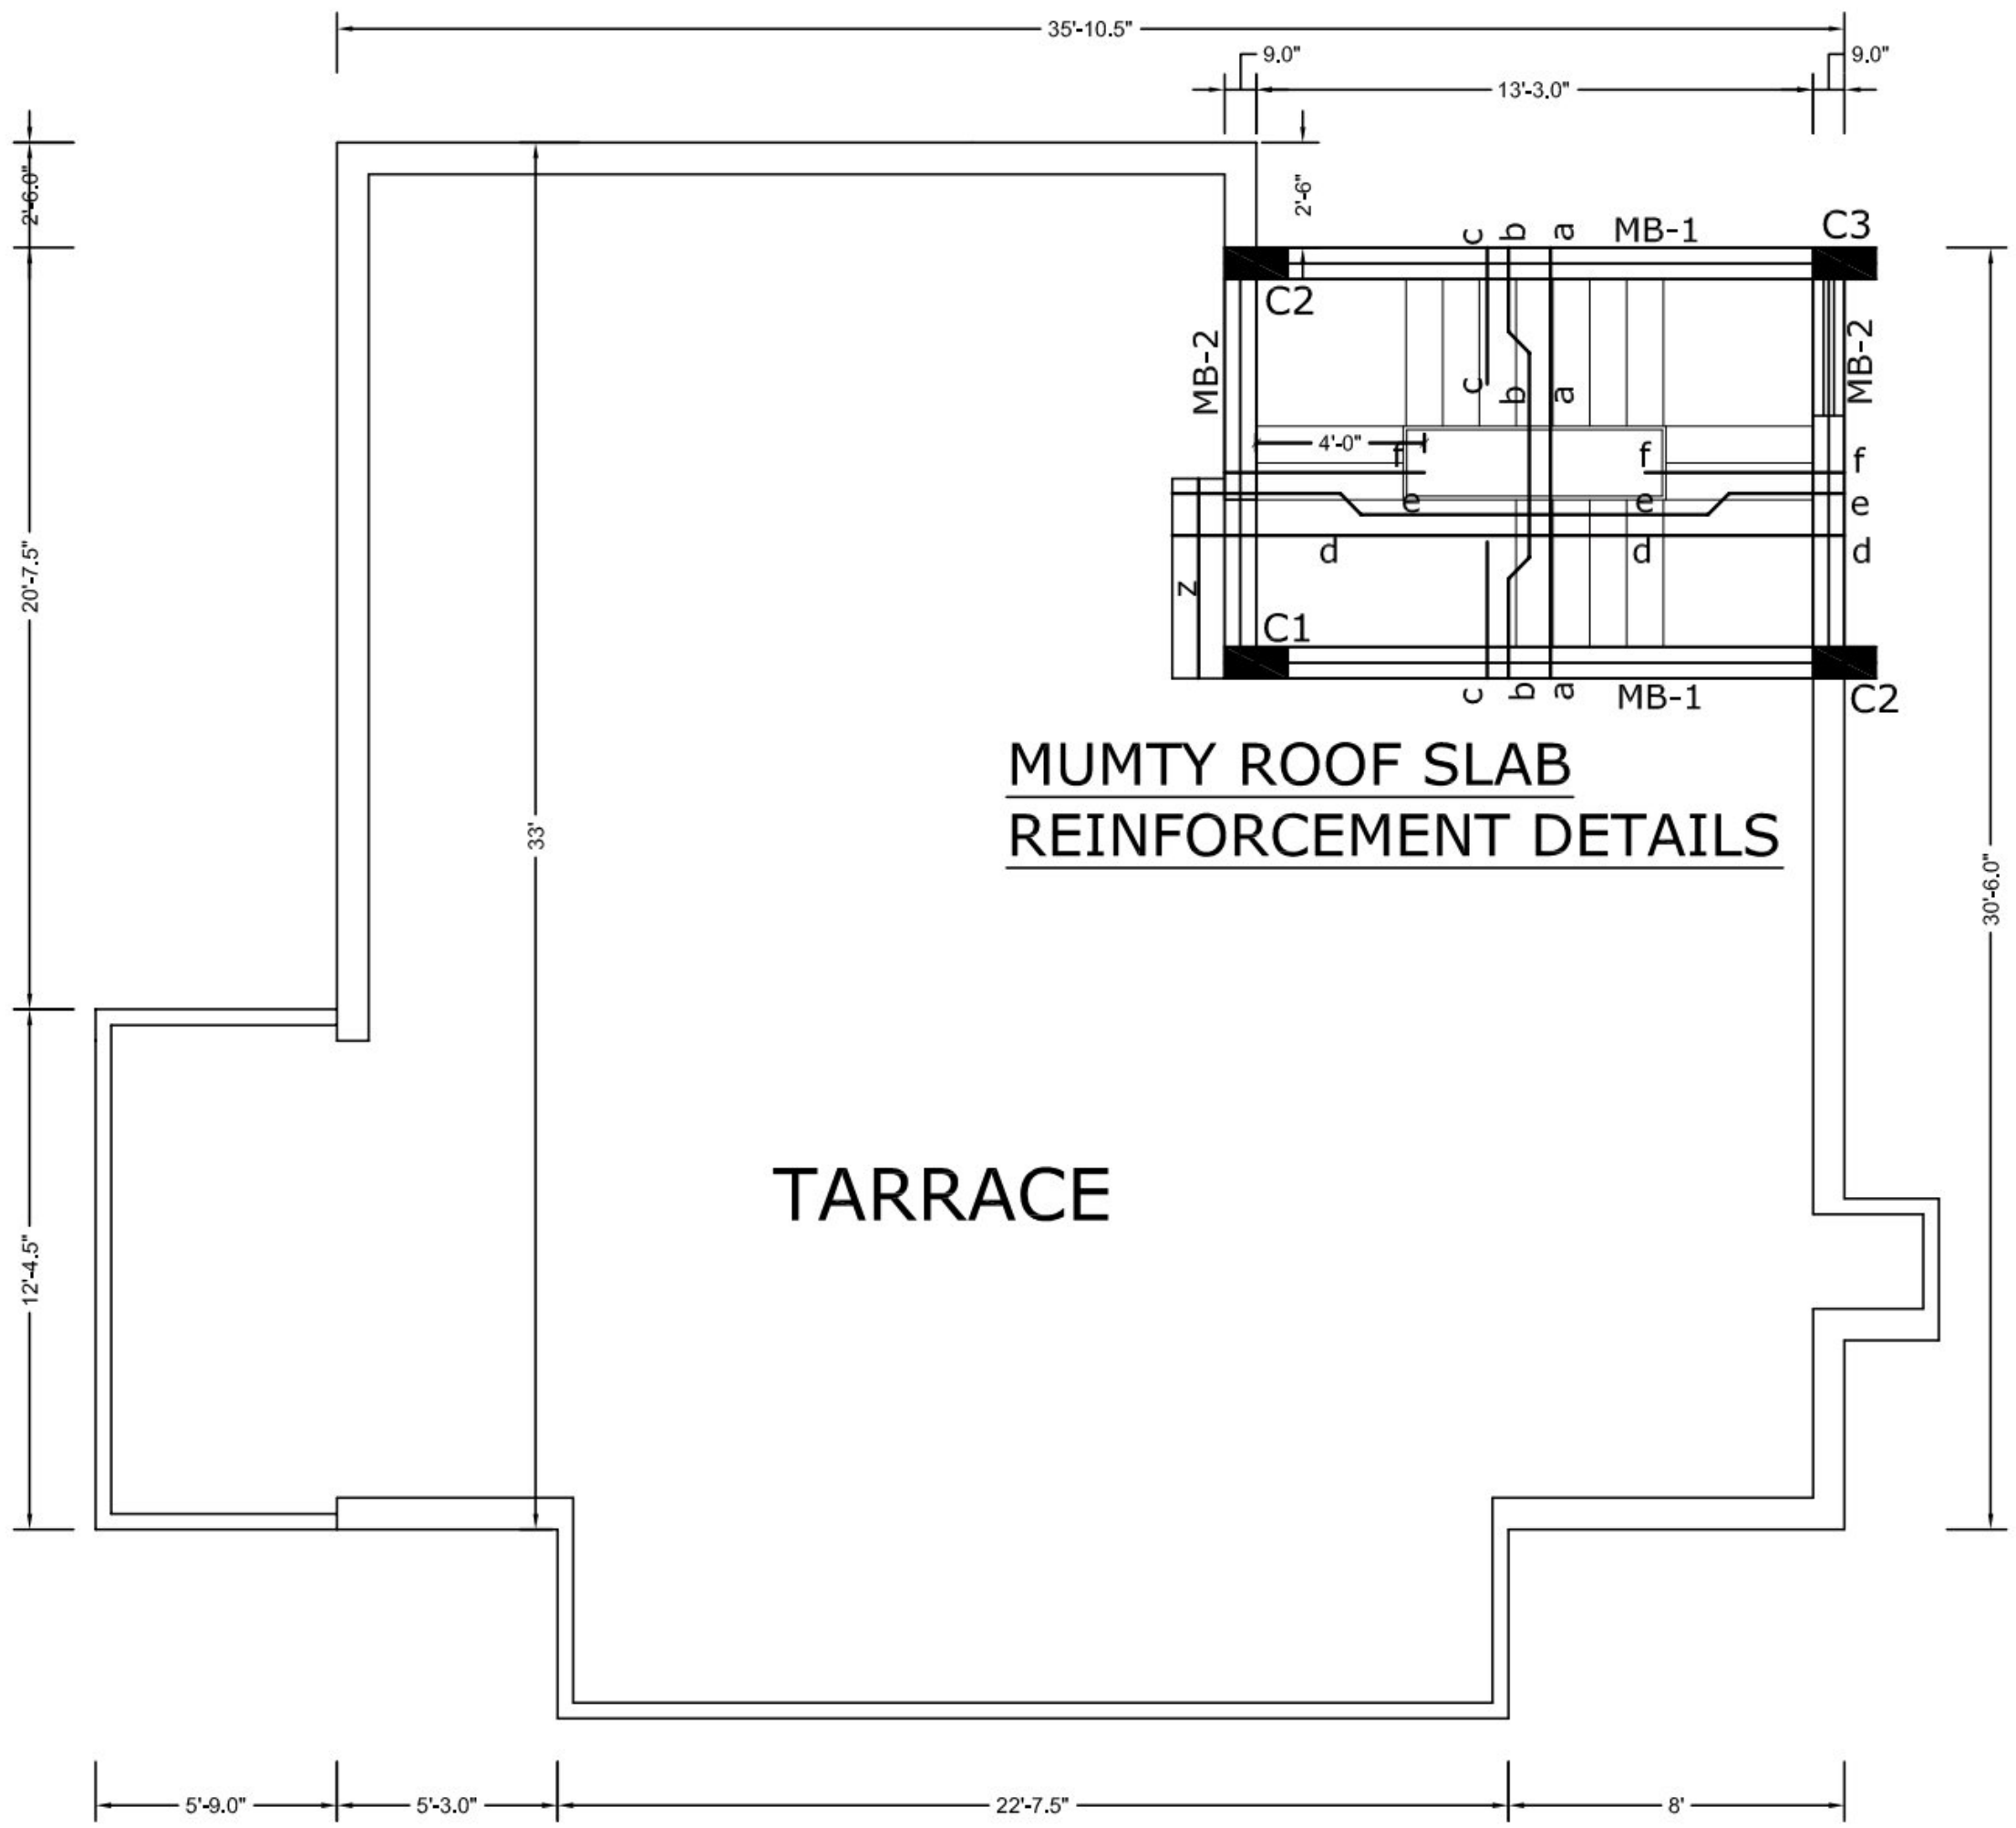

MUMTY ROOF SLAB REINFORCEMENT DETAILS

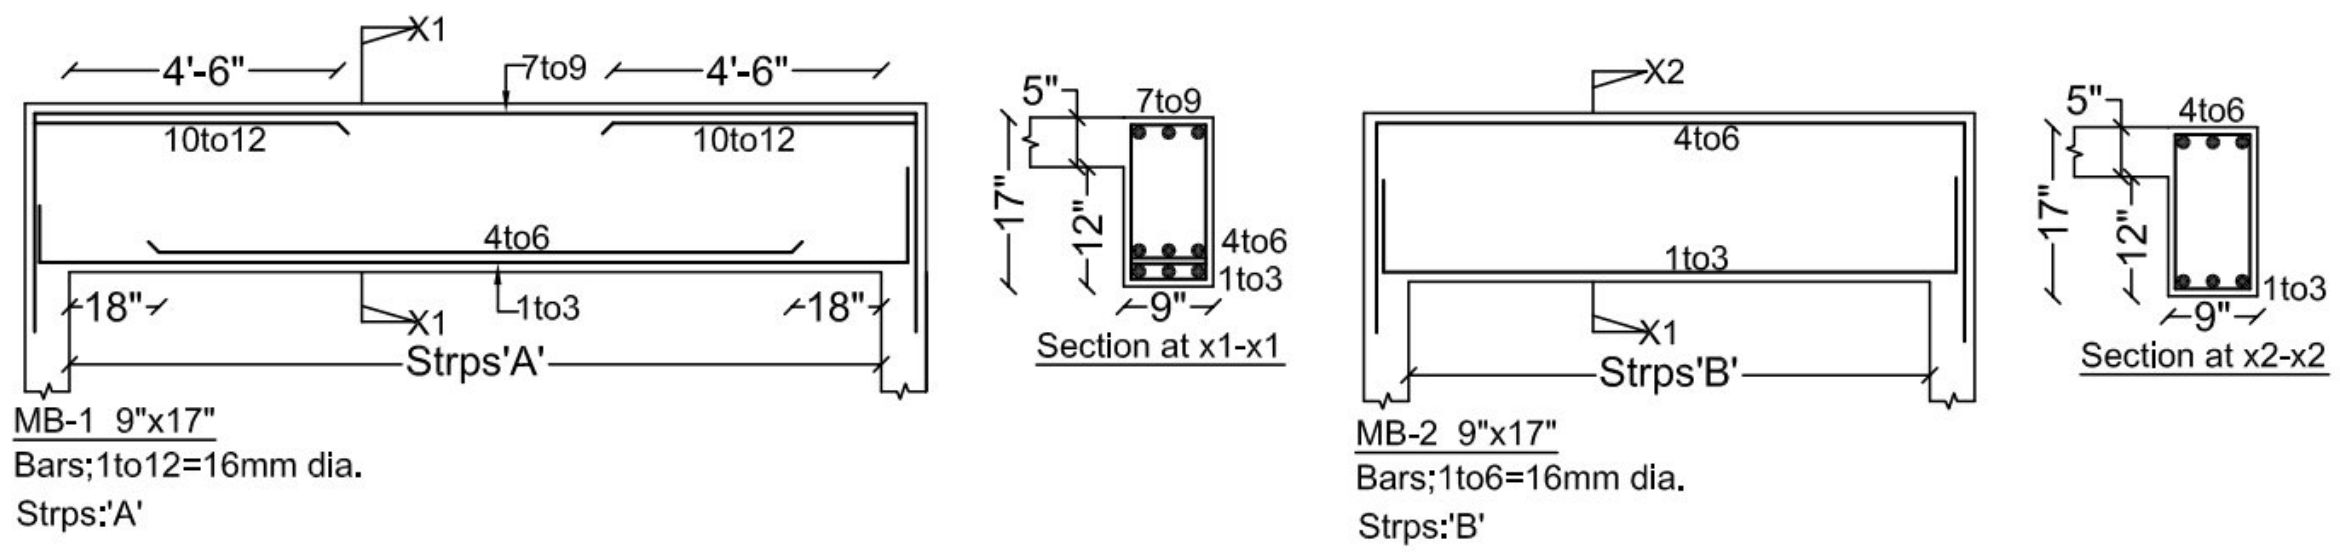

MUMTY Roof Slab Reinforcement Details

SLAB THICKNESS =5" thk.

CONC. USED = M-20

SCHEDULE OF BARS

a = 10mm dia. @12"c/c (B) ⎤ Net spacing
b = 10mm dia. @12"c/c (C) ⎦ @6"c/c
c = 10mm dia. @12"c/c (T)
d = 10mm dia. @16"c/c (B) ⎤ Net spacing
e = 10mm dia. @16"c/c (C) ⎦ @8"c/c
f = 10mm dia. @16"c/c (T)

z= Distt. / Holding Bars 10mm dia. @ 8"c/c

STIRRUPS DETAIL

Strps'A';8mm dia. 2L 12Nos. @ 4"c/c + rest @ 8" c/c
Strps'B';8mm dia. 2L @ 6"c/c.
Strps'C';10mm dia. 2L 12Nos. @ 4"c/c + rest @ 8" c/c
Strps'D';10mm dia. 2L @ 6"c/c.
Strps'E';10mm dia. 4L 12Nos. @ 4"c/c + rest @ 8" c/c

NOTES

1. DIMENSIONS ARE TO BE READ NOT TO BE SCALED.
2. CONTRACTOR IS TO CHECK ALL DIMENSIONS BEFORE EXECUTION OF WORK.
3. 'Ø' INDICATES THE DIA OF HYSD BARS OF GRADE Fe 500 REFER TO IS: 1786,2008
4. FOR CENTER LINE DIMENSIONS REFER ARCH.DRG'S.
5. NOT MORE THAN 50% BARS ARE TO BE LAPPED AT ONE LOCATION.
6. LAP LENGTH / ANCHORAGE LENGTH:
   (i) 50d IN CASE OF FOUNDATION,BEAM & SLAB
   (ii)45d IN CASE OF COLUMNS
   WHERE 'd ' IS DIA OF BARS.
7. CLEAR COVER TO REINF.:
   (i) FOUNDATION = 60mm (BOTTOM),30mm(SIDE),25mm(TOP)
   (ii) COLUMN = 40mm
   (iii) BEAM = 30mm
   (iv) SLAB = 25mm
8. EXTRA BARS TO BE EXTEND 0.3L ON EITHER SIDE OF SUPPORTING BEAM OR COLUMN.
9. TOP EXTRA REINF. IN BEAM AND SLAB TO EXTEND 0.3L FROM THE FACE OF SUPPORT (BEAM/COLUMN) WHERE 'L' IS THE EFFECTIVE SPAN OF SLAB/BEAM IN THAT DIRECTION.
10. CONCRETE USED :M-20 (1:1½:3)

Overlap / Anchorage / Development Length 'L'(mm)		
Dia of Bar	Steel Reinforcement of Grade Fe 500 Concrete M20	
(mm)	Beam/Slab Foundation (Tension Member)	Columns / LIFT (Compression Member)
8	450	375
10	600	450
12	700	600
16	900	750
20	1150	900
25	1450	1150
28	1600	1300
32	1800	1450

STRUCTURE CONSULTANTS :

SYAL & ASSOCIATES
(Chartered Engineers,Architects & Project Management Consultants)
ATRIUM 204, PLOT NO. C-204, INDUSTRIAL AREA8-B,SECTOR 74, MOHALI. 160074(PB)
PH 0172-4629234, 5091645

CLIENT:-

PROJECT:-
STANDARD GOVT. VETERINARY DISPENSARY (SBC OF SOIL IS 10t/m2)

REVISION :

S T R U C T U R E

MUMTY ROOF SLAB AND BEAMS REINFORCEMENT DETAIL

STRUCTURAL CONSULTANT :
SIGNATURE & STAMP:

PROJECT NO:-	2085
DRAWN BY :	Ram Nath
SCALE :	N.T.S
DATE :	13-10-2020
DRG. NO. :	S-105

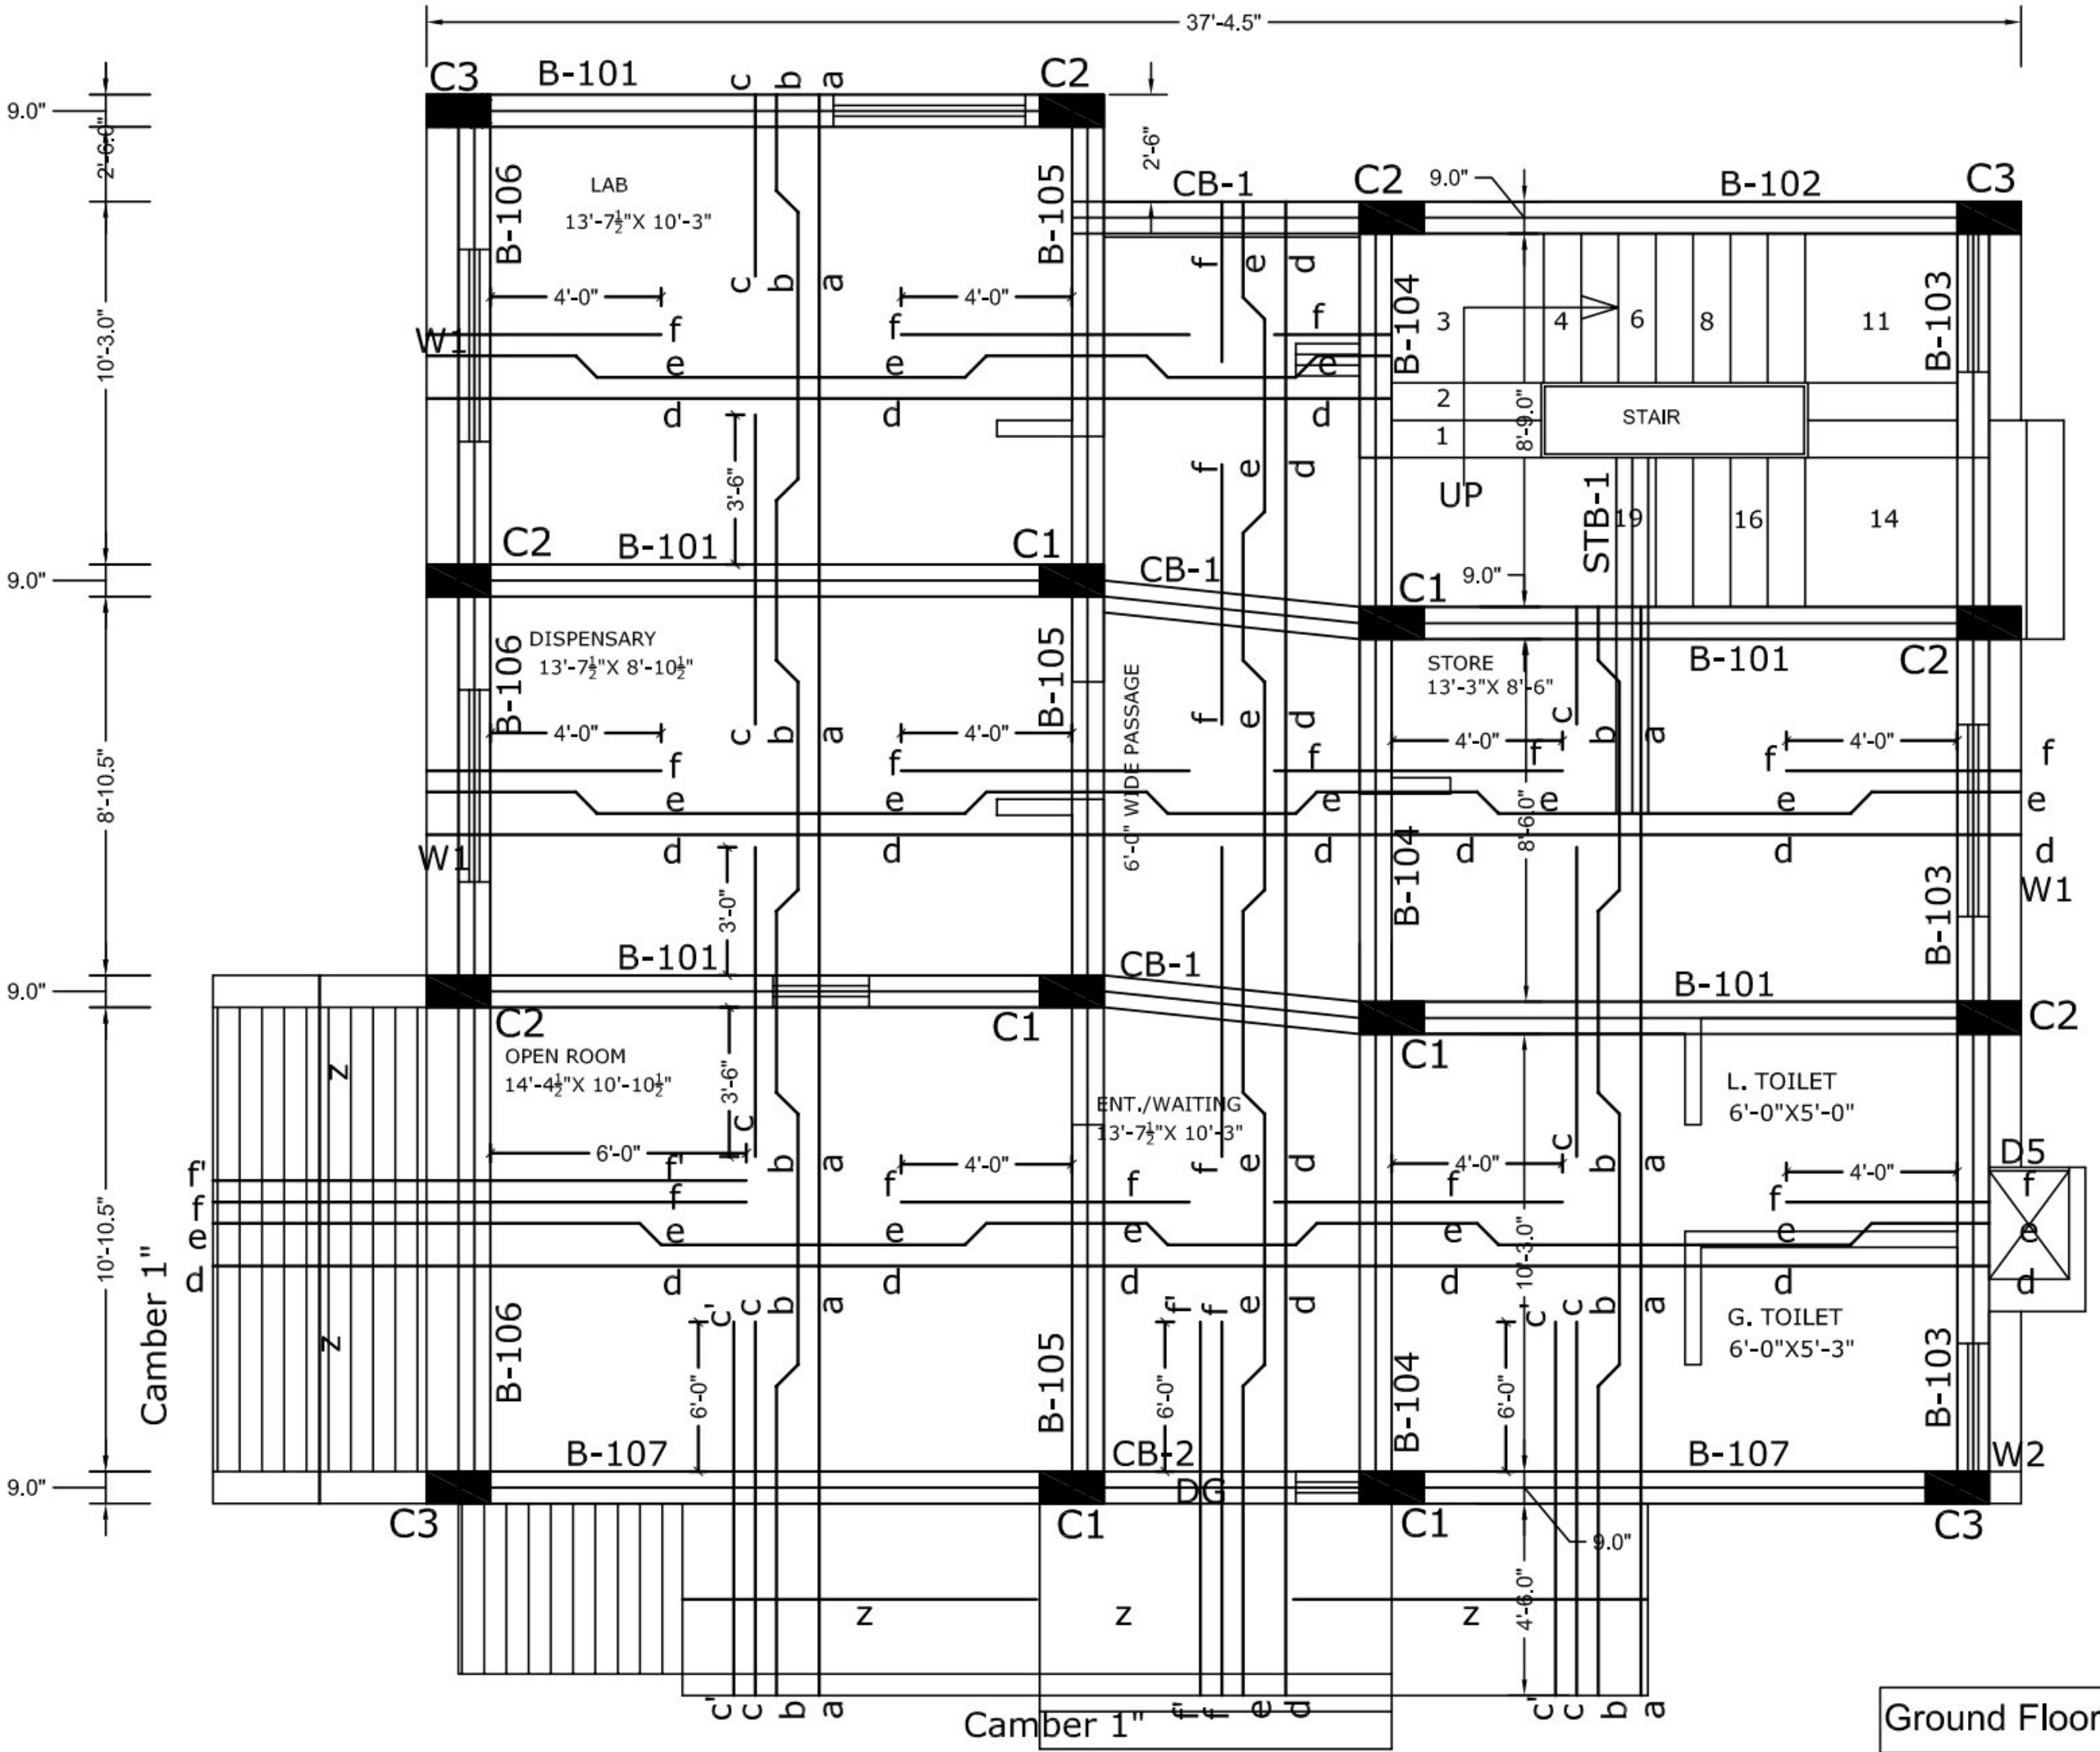

GROUND FLOOR Roof Slab Reinforcement Details

Ground Floor Roof Slab Reinforcement Details

SLAB THICKNESS =5" thk.

CONC. USED = M-20

SCHEDULE OF BARS

a = 10mm dia. @12"c/c (B) ⎤ Net spacing
b = 10mm dia. @12"c/c (C) ⎦ @6"c/c
c = 12mm dia. @12"c/c (T)
c' = 10mm dia. @ 6"c/c (T)
d = 10mm dia. @16"c/c (B) ⎤ Net spacing
e = 10mm dia. @16"c/c (C) ⎦ @8"c/c
f = 12mm dia. @16"c/c (T)
f ' = 10mm dia. @ 8"c/c (T)
z= Distt. / Holding Bars 10mm dia. @ 8"c/c

NOTES

1. DIMENSIONS ARE TO BE READ NOT TO BE SCALED.
2. CONTRACTOR IS TO CHECK ALL DIMENSIONS BEFORE EXECUTION OF WORK.
3. 'Ø' INDICATES THE DIA OF HYSD BARS OF GRADE Fe 500 REFER TO IS: 1786,2008
4. FOR CENTER LINE DIMENSIONS REFER ARCH.DRG'S.
5. NOT MORE THAN 50% BARS ARE TO BE LAPPED AT ONE LOCATION.
6. LAP LENGTH / ANCHORAGE LENGTH:
   (i) 50d IN CASE OF FOUNDATION,BEAM & SLAB
   (ii)45d IN CASE OF COLUMNS
   WHERE 'd ' IS DIA OF BARS.
7. CLEAR COVER TO REINF.:
   (i) FOUNDATION = 60mm (BOTTOM),30mm(SIDE),25mm(TOP)
   (ii) COLUMN = 40mm
   (iii) BEAM = 30mm
   (iv) SLAB = 25mm
8. EXTRA BARS TO BE EXTEND 0.3L ON EITHER SIDE OF SUPPORTING BEAM OR COLUMN.
9. TOP EXTRA REINF. IN BEAM AND SLAB TO EXTEND 0.3L FROM THE FACE OF SUPPORT (BEAM/COLUMN) WHERE 'L' IS THE EFFECTIVE SPAN OF SLAB/BEAM IN THAT DIRECTION.
10. CONCRETE USED :M-20 (1:1½:3)

Overlap / Anchorage / Development Length 'L'(mm)

Dia of Bar (mm)	Steel Reinforcement of Grade Fe 500, Concrete M20: Beam/Slab Foundation (Tension Member)	Columns / LIFT (Compression Member)
8	450	375
10	600	450
12	700	600
16	900	750
20	1150	900
25	1450	1150
28	1600	1300
32	1800	1450

STRUCTURE CONSULTANTS :

SYAL & ASSOCIATES
(Chartered Engineers,Architects & Project Management Consultants)
ATRIUM 204, PLOT NO. C-204, INDUSTRIAL AREA8-B,SECTOR 74, MOHALI. 160074(PB)
PH 0172-4629234, 5091645

CLIENT:-

PROJECT:-
STANDARD GOVT. VETERINARY DISPENSARY (SBC OF SOIL IS 10t/m2)

REVISION :

S T R U C T U R E

GROUND FLOOR ROOF SLAB AND BEAMS REINFORCEMENT DETAIL

STRUCTURAL CONSULTANT :
SIGNATURE & STAMP:

PROJECT NO:-	2085
DRAWN BY :	Ram Nath
SCALE :	N.T.S
DATE :	13-10-2020
DRG. NO. :	S-103

PRODUCED BY AN AUTODESK EDUCATIONAL PRODUCT
PRODUCED BY AN AUTODESK EDUCATIONAL PRODUCT
PRODUCED BY AN AUTODESK EDUCATIONAL PRODUCT

LINTEL FOR 9" WALL

SPAN	SIZE	REINFORCEMENT	STRIPPES	SHAPE
CLEAR SPAN UPTO 4'-0"	9" X 6"	12mm dia tor 2Nos (T) 12mm dia tor 3Nos (B)	8mm dia tor 2L @ 6" c/c.	
4'-0" < CLEAR SPAN ≤ 6'-0"	9" X 9"	12mm dia tor 2Nos (T) 12mm dia tor 4Nos (B) (CRANK 2 NOS MIDDLE)	8mm dia tor 2L @ 6" c/c.	
6'-0" < CLEAR SPAN ≤ 8'-0"	9" X 12"	12mm dia tor 2Nos (T) 16mm dia tor 2Nos +12mm dia tor 2Nos(B) (CRANK 2 NOS 12mm dia bars)	8mm dia tor 2L 6Nos @ 4" c/c. +rest @ 6" c/c.	
8'-0" < CLEAR SPAN ≤ 10'-0"	9" X 15"	16mm dia tor 2Nos (T) 16mm dia tor 4Nos(B) (CRANK 2 NOS MIDDLE)	8mm dia tor 2L 9Nos @ 4" c/c. +rest @ 6" c/c.	
10'-0" < CLEAR SPAN ≤ 12'-0"	9" X 18"	16mm dia tor 2Nos (T) 16mm dia tor 4Nos(B) (CRANK 2 NOS MIDDLE)	8mm dia tor 2L 12Nos @ 4" c/c. +rest @ 6" c/c.	
12'-0" < CLEAR SPAN ≤ 14'-0"	9" X 18"	16mm dia tor 2Nos (T) 20mm dia tor 2Nos +16mm dia tor 2Nos(B) (CRANK 2 NOS 16mm dia bars)	8mm dia tor 2L 12Nos @ 4" c/c. +rest @ 6" c/c.	
CLEAR SPAN < 18'-0"	9" X 18"	20mm dia tor 2Nos (T) 20mm dia tor 4Nos(B) (CRANK 2 NOS 20mm dia bars)	10mm dia tor 2L 12Nos @ 4" c/c. +rest @ 6" c/c.	

LINTEL FOR $4\frac{1}{2}$" WALL

SPAN	SIZE	REINFORCEMENT	STRIPPES	SHAPE
CLEAR SPAN UPTO 4'-0"	$4\frac{1}{2}$" X 6"	10mm dia tor 2Nos (T) 10mm dia tor 3Nos (B)	8mm dia tor 2L @ 6" c/c.	
4'-0" < CLEAR SPAN ≤ 6'-0"	$4\frac{1}{2}$" X 9"	12mm dia tor 2Nos (T) 12mm dia tor 3Nos (B)	8mm dia tor 2L @ 6" c/c.	

NOTES

1. DIMENSIONS ARE TO BE READ NOT TO BE SCALED.
2. CONTRACTOR IS TO CHECK ALL DIMENSIONS BEFORE EXECUTION OF WORK.
3. 'Ø' INDICATES THE DIA OF HYSD BARS OF GRADE Fe 500 REFER TO IS: 1786,2008
4. FOR CENTER LINE DIMENSIONS REFER ARCH.DRG'S.
5. NOT MORE THAN 50% BARS ARE TO BE LAPPED AT ONE LOCATION.
6. LAP LENGTH / ANCHORAGE LENGTH:
   (i) 50d IN CASE OF FOUNDATION,BEAM & SLAB
   (ii) 45d IN CASE OF COLUMNS
   WHERE 'd' IS DIA OF BARS.
7. CLEAR COVER TO REINF.:
   (i) FOUNDATION = 60mm (BOTTOM),30mm(SIDE),25mm(TOP)
   (ii) COLUMN = 40mm
   (iii) BEAM = 30mm
   (iv) SLAB = 25mm
8. EXTRA BARS TO BE EXTEND 0.3L ON EITHER SIDE OF SUPPORTING BEAM OR COLUMN.
9. TOP EXTRA REINF. IN BEAM AND SLAB TO EXTEND 0.3L FROM THE FACE OF SUPPORT (BEAM/COLUMN) WHERE 'L' IS THE EFFECTIVE SPAN OF SLAB/BEAM IN THAT DIRECTION.
10. CONCRETE USED :M-20 ($1:1\frac{1}{2}:3$)

STRUCTURE CONSULTANTS :

SYAL & ASSOCIATES
(Chartered Engineers,Architects & Project Management Consultants)
ATRIUM 204, PLOT NO. C-204, INDUSTRIAL AREA8-B,SECTOR 74, MOHALI. 160074(PB)
PH 0172-4629234, 5091645

CLIENT:-

PROJECT:-
STANDARD GOVT. VETERINARY DISPENSARY (SBC OF SOIL IS 10t/m2)

REVISION:

S T R U C T U R E

LINTEL BEAMS REINFORCEMENT DETAIL

SIGNATURE & STAMP:

PROJECT NO:-	2085
DRAWN BY :	Ram Nath
SCALE :	N.T.S
DATE :	13-10-2020
DRG. NO. :	S-106

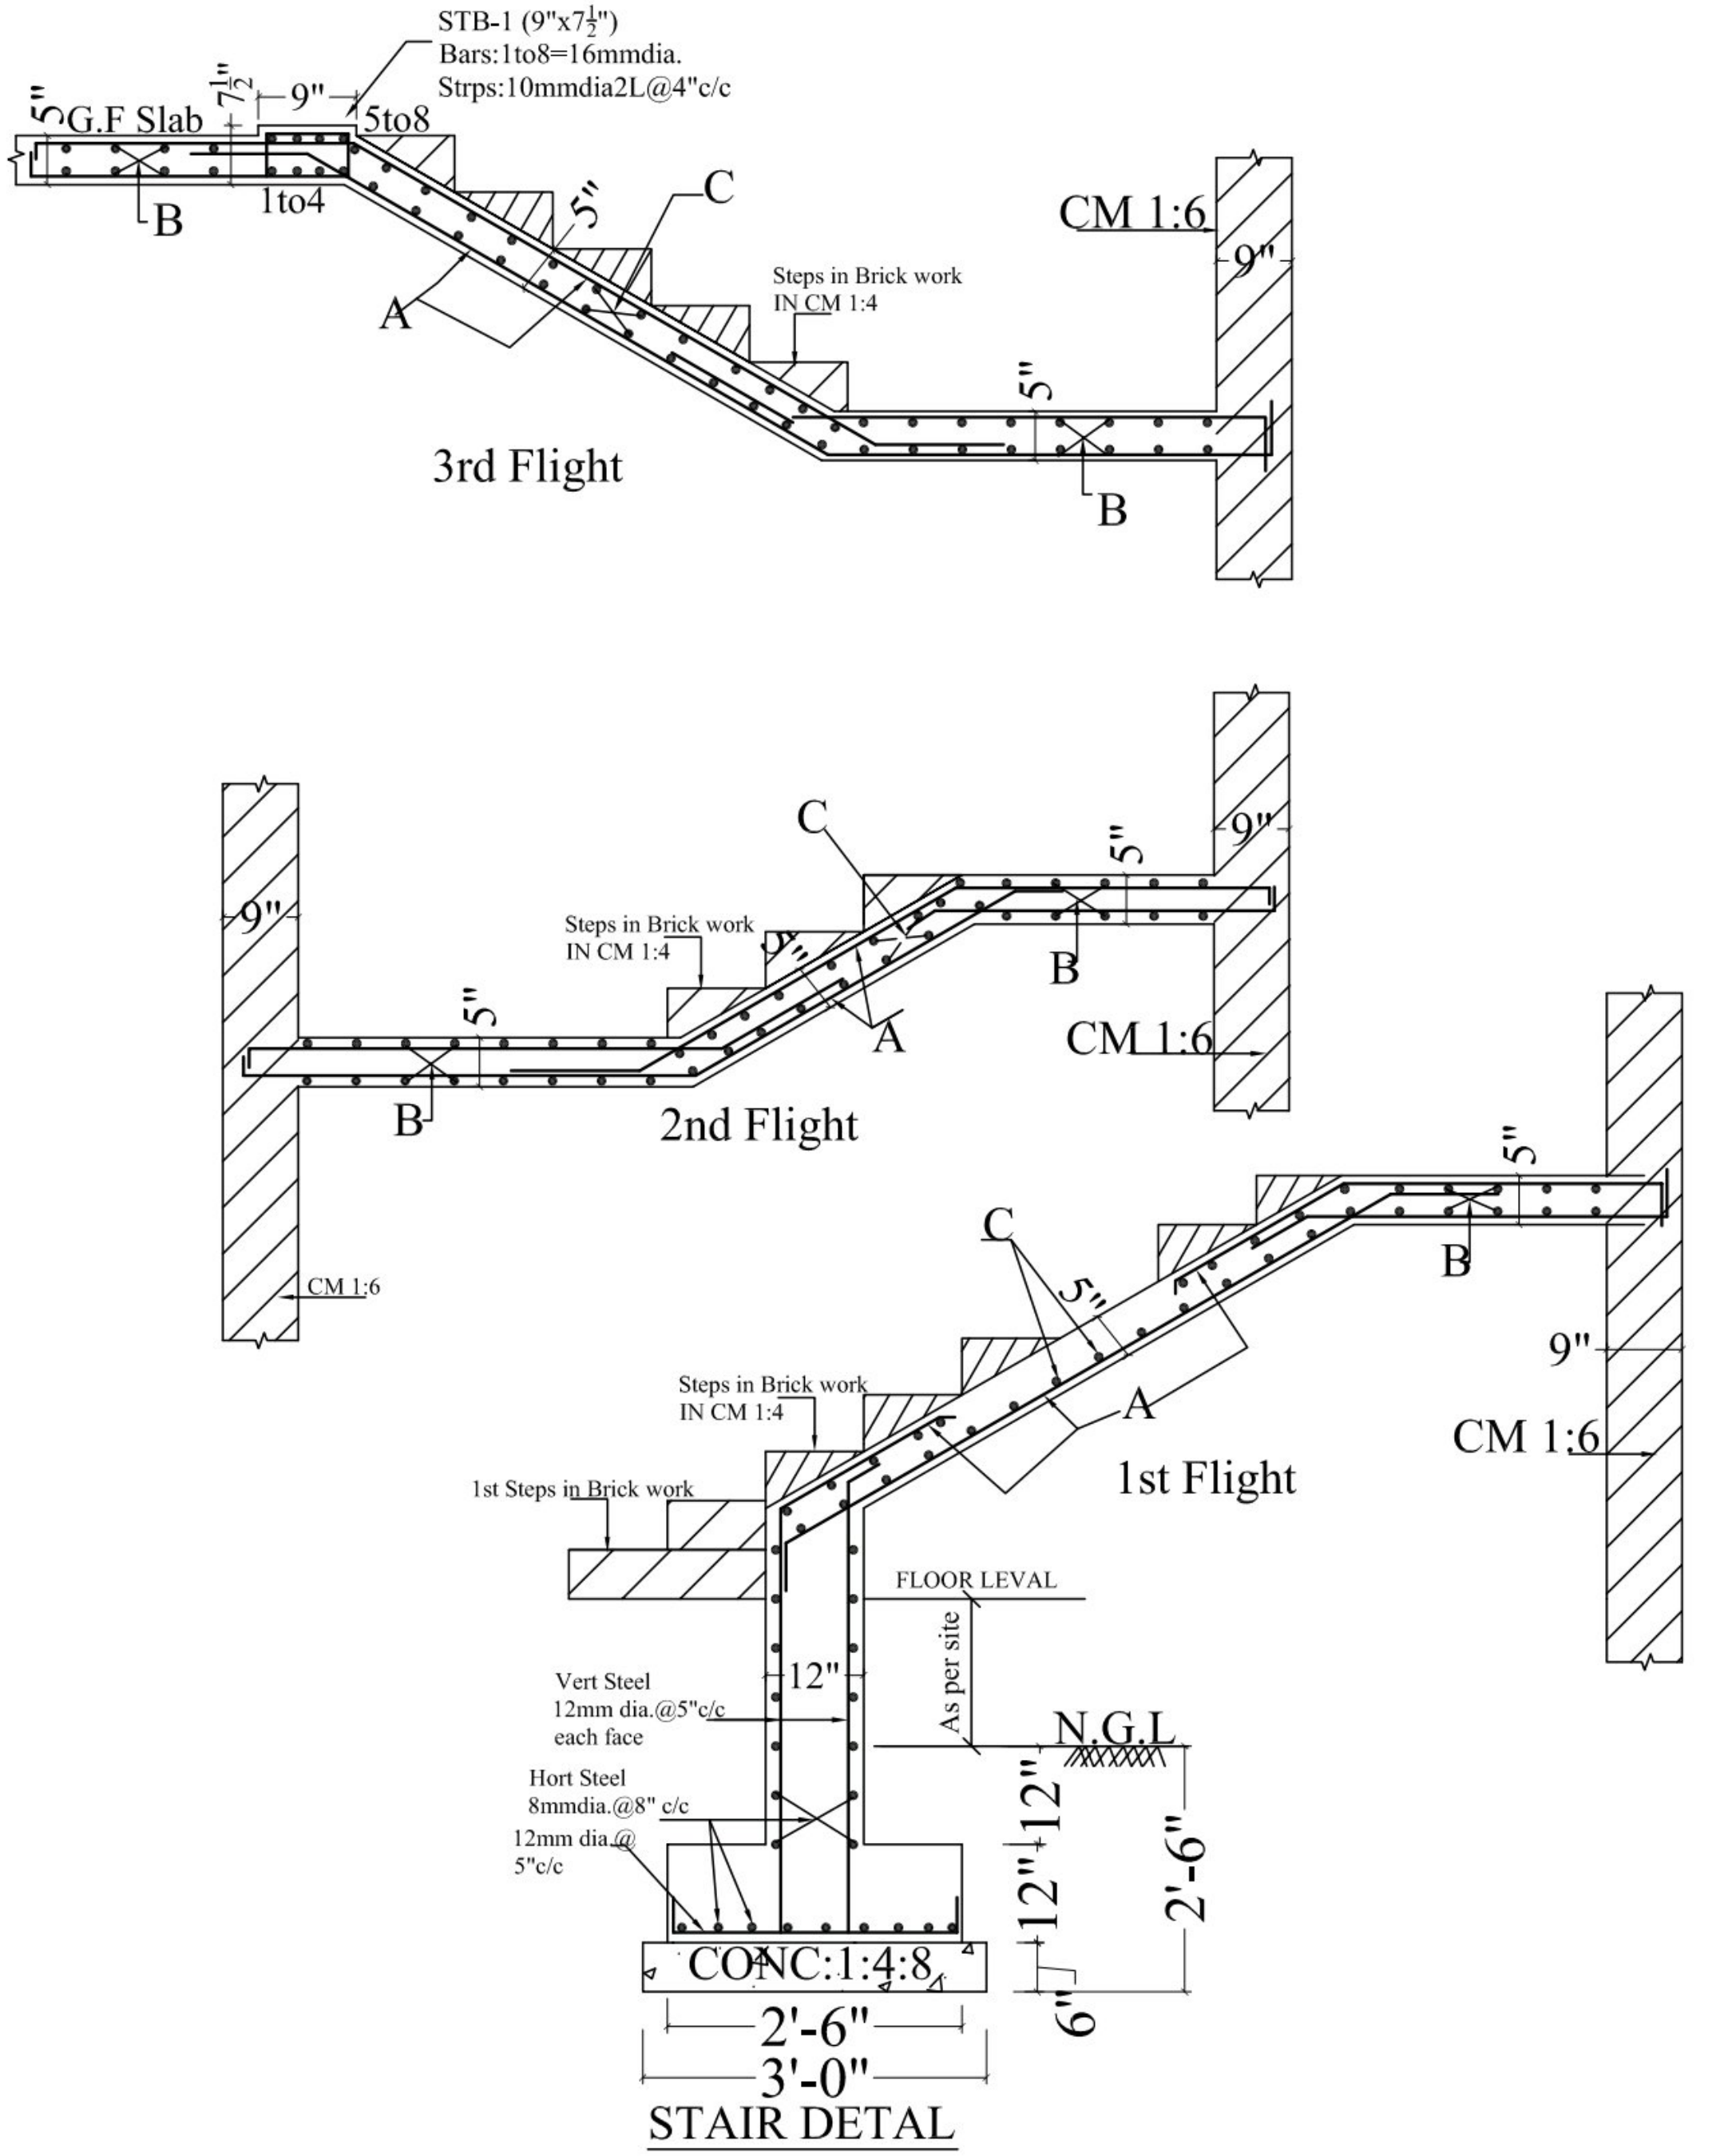

'A' = 12 mm dia.@ 5"c/c

'B' = 12mm dia. @ 5"c/c bothways (T&B)

'C' = 8mm dia. @8"c/c

NOTES

1. DIMENSIONS ARE TO BE READ NOT TO BE SCALED.
2. CONTRACTOR IS TO CHECK ALL DIMENSIONS BEFORE EXECUTION OF WORK.
3. 'Ø' INDICATES THE DIA OF HYSD BARS OF GRADE Fe 500 REFER TO IS: I786,2008
4. FOR CENTER LINE DIMENSIONS REFER ARCH.DRG'S.
5. NOT MORE THAN 50% BARS ARE TO BE LAPPED AT ONE LOCATION.
6. LAP LENGTH / ANCHORAGE LENGTH:
   (I) 50d IN CASE OF FOUNDATION,BEAM & SLAB
   (II)45d IN CASE OF COLUMNS
   WHERE 'd ' IS DIA OF BARS.
7. CLEAR COVER TO REINF.:
   (i) FOUNDATION = 60mm (BOTTOM),30mm(SIDE),25mm(TOP)
   (ii) COLUMN = 40mm
   (iii) BEAM = 30mm
   (iv) SLAB = 25mm
8. EXTRA BARS TO BE EXTEND 0.3L ON EITHER SIDE OF SUPPORTING BEAM OR COLUMN.
9. TOP EXTRA REINF. IN BEAM AND SLAB TO EXTEND 0.3L FROM THE FACE OF SUPPORT (BEAM/COLUMN) WHERE 'L' IS THE EFFECTIVE SPAN OF SLAB/BEAM IN THAT DIRECTION.
10. CONCRETE USED :M-20 (1:1½:3)

Overlap / Anchorage / Development Length 'L'(mm)

Dia of Bar (mm)	Steel Reinforcement of Grade Fe 500 Concrete M20 Beam/Slab Foundation (Tension Member)	Columns / LIFT (Compression Member)
8	450	375
10	600	450
12	700	600
16	900	750
20	1150	900
25	1450	1150
28	1600	1300
32	1800	1450

STRUCTURE CONSULTANTS:

SYAL & ASSOCIATES
(Chartered Engineers,Architects & Project Management Consultants)
ATRIUM 204, PLOT NO. C-204, INDUSTRIAL AREA8-B,SECTOR 74, MOHALI. 160074(PB)
PH 0172-4629234, 5091645

CLIENT:-

PROJECT:-
STANDARD GOVT. VETERINARY DISPENSARY (SBC OF SOIL IS 10t/m2)

REVISION :

S T R U C T U R E

STAIR REINFORCEMENT DETAIL

STRUCTURAL CONSULTANT :
SIGNATURE & STAMP:

PROJECT NO:-	2085
DRAWN BY :	Ram Nath
SCALE :	N.T.S
DATE :	13-10-2020
DRG. NO. :	S-102

PRODUCED BY AN AUTODESK EDUCATIONAL PRODUCT
PRODUCED BY AN AUTODESK EDUCATIONAL PRODUCT
PRODUCED BY AN AUTODESK EDUCATIONAL PRODUCT

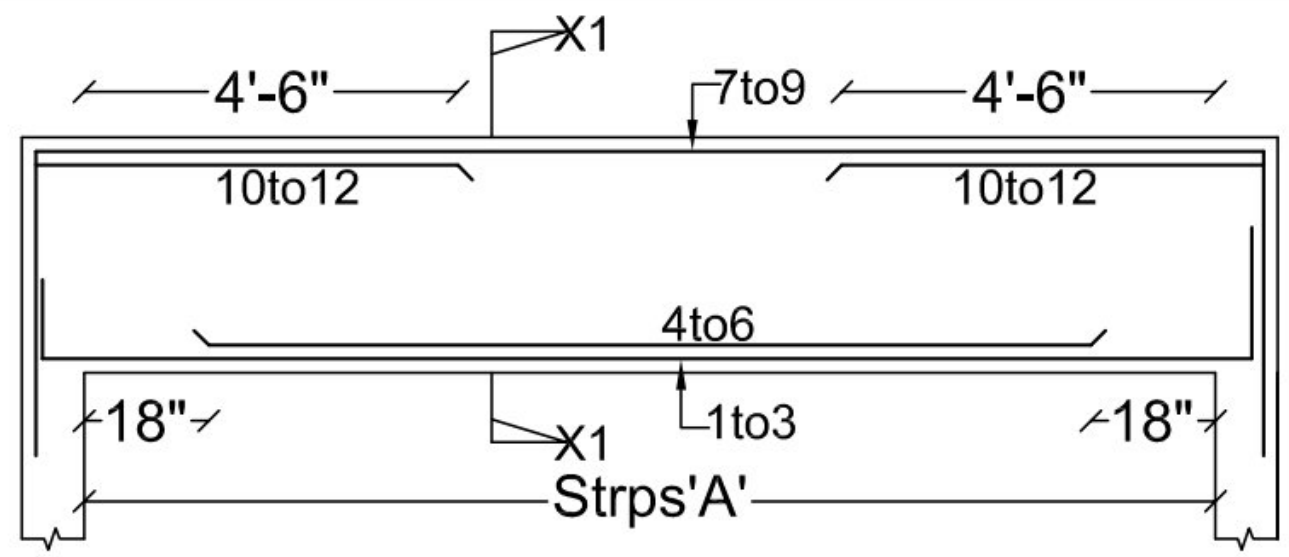

B-101 9"x17", B-102 9"x17"
Bars;1to12=16mm dia.
Strps:'A'



Section at x1-x1



CB-1,9"x7$\frac{1}{2}$"
Bars;1to6=16mm dia.
Strps:'8mm dia 2L@6"c/c



CB-2,9"x7$\frac{1}{2}$"
Bars;1to8=16mm dia.
Strps:'10mm dia 2L@6"c/c

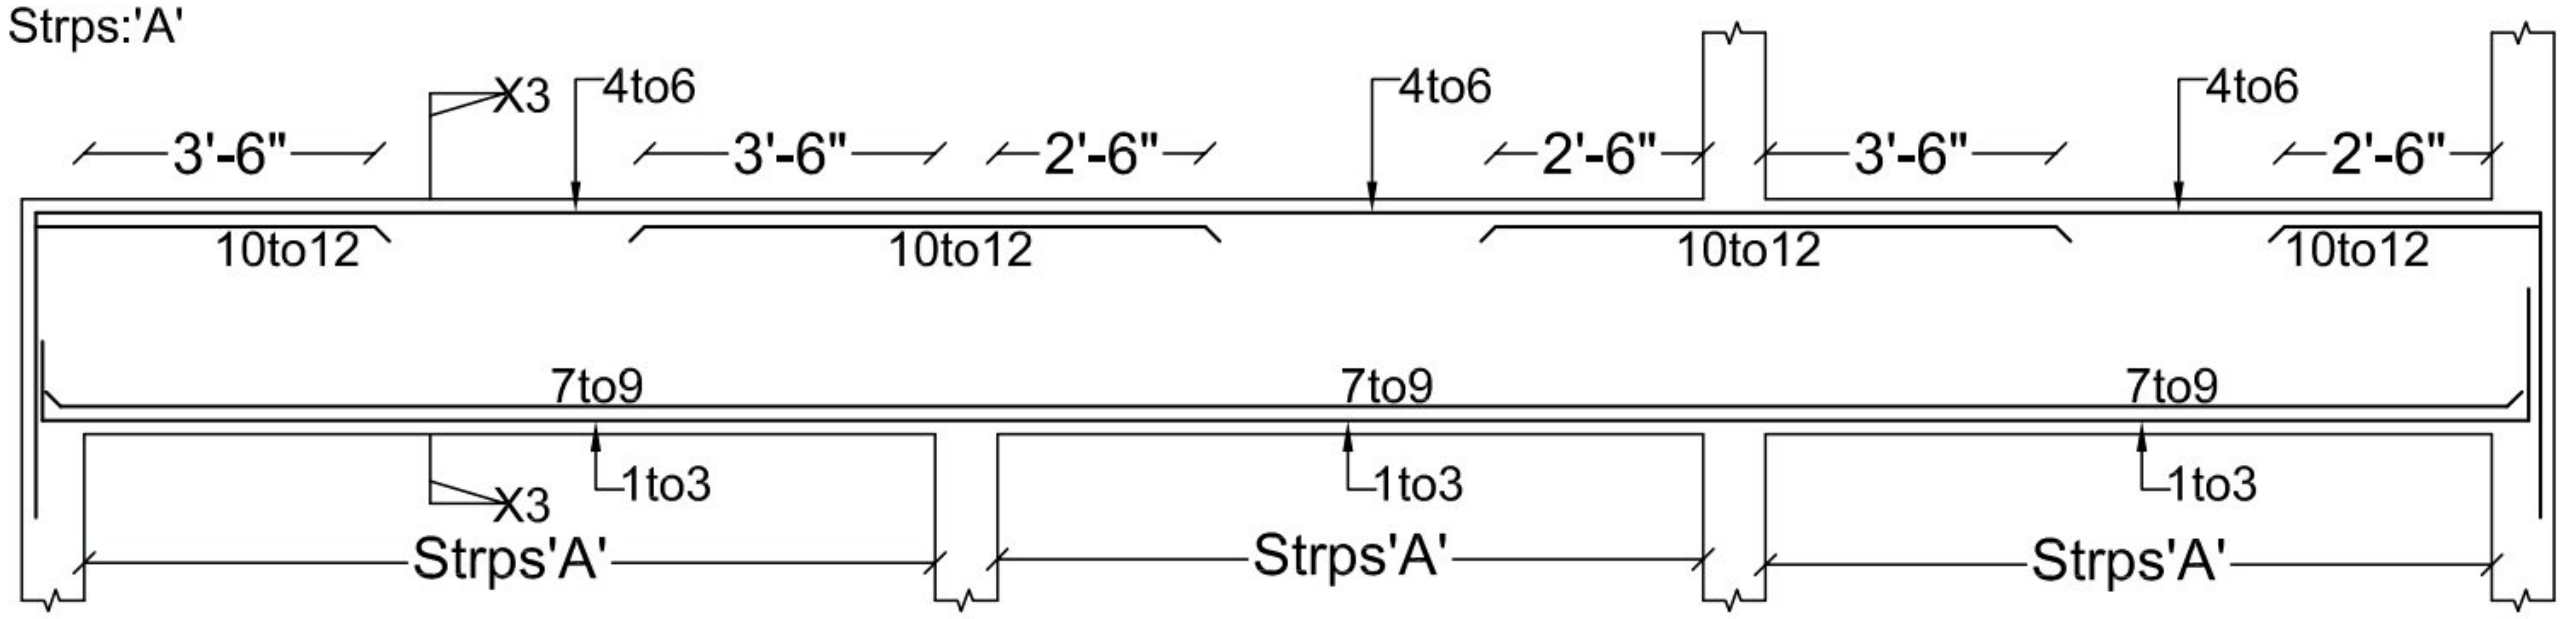

B-103 9"x17",B-104 9"x17",B-105 9"x17", B-107 9"x17"
Bars;1to6=16mm dia.
7to12=12mm dia.
Strps:'A'



Section at x3-x3

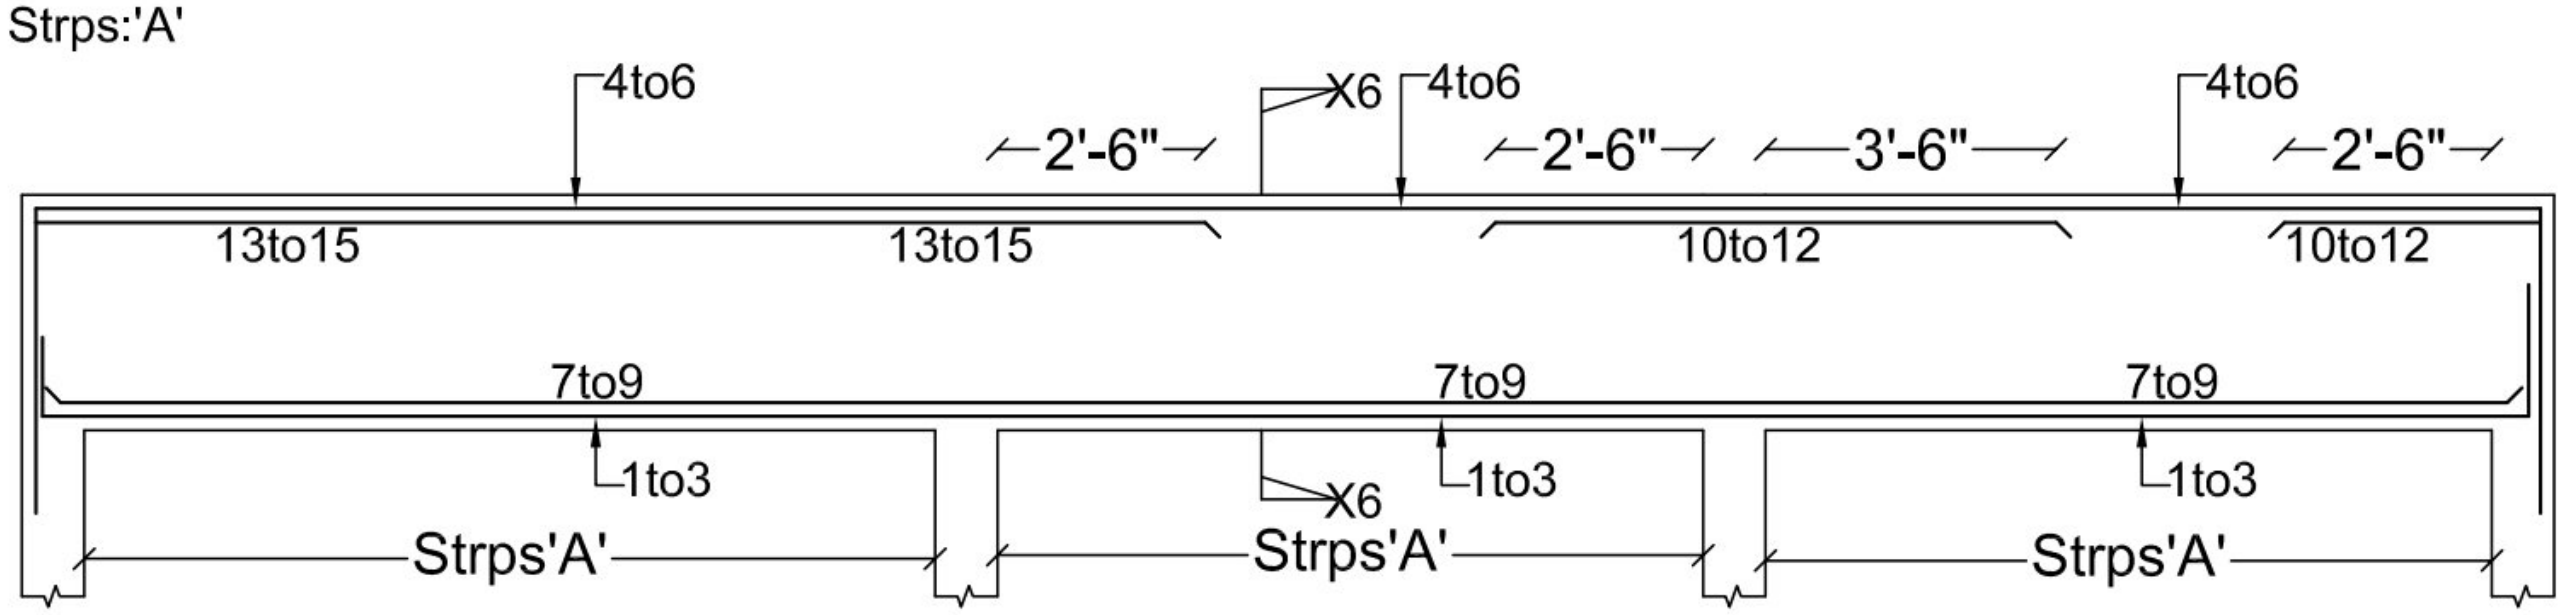



Section at x3-x3

B-106 9"x17"

Bars;1to6,13to15=16mm dia.
7to12=12mm dia.
Strps:'A'

STIRRUPS DETAIL

Strps'A';8mm dia. 2L 12Nos. @ 4"c/c
+ rest @ 8" c/c
Strps'B';8mm dia. 2L @ 6"c/c.
Strps'C';10mm dia. 2L 12Nos. @ 4"c/c
+ rest @ 8" c/c
Strps'D';10mm dia. 2L @ 6"c/c.
Strps'E';10mm dia. 4L 12Nos. @ 4"c/c
+ rest @ 8" c/c

NOTES

1. DIMENSIONS ARE TO BE READ NOT TO BE SCALED.
2. CONTRACTOR IS TO CHECK ALL DIMENSIONS BEFORE EXECUTION OF WORK.
3. 'Ø' INDICATES THE DIA OF HYSD BARS OF GRADE Fe 500 REFER TO IS: I786,2008
4. FOR CENTER LINE DIMENSIONS REFER ARCH.DRG'S.
5. NOT MORE THAN 50% BARS ARE TO BE LAPPED AT ONE LOCATION.
6. LAP LENGTH / ANCHORAGE LENGTH:
   (i) 50d IN CASE OF FOUNDATION,BEAM & SLAB
   (ii)45d IN CASE OF COLUMNS
   WHERE 'd ' IS DIA OF BARS.
7. CLEAR COVER TO REINF.:
   (I) FOUNDATION = 60mm (BOTTOM),30mm(SIDE),25mm(TOP)
   (ii) COLUMN = 40mm
   (iii) BEAM = 30mm
   (iv) SLAB = 25mm
8. EXTRA BARS TO BE EXTEND 0.3L ON EITHER SIDE OF SUPPORTING BEAM OR COLUMN.
9. TOP EXTRA REINF. IN BEAM AND SLAB TO EXTEND 0.3L FROM THE FACE OF SUPPORT (BEAM/COLUMN) WHERE 'L' IS THE EFFECTIVE SPAN OF SLAB/BEAM IN THAT DIRECTION.
10. CONCRETE USED :M-20 (1:1$\frac{1}{2}$:3)
11. SBC OF SOIL= 10t/m²

Overlap / Anchorage / Development Length 'L'(mm)		
Dia of Bar	Steel Reinforcement of Grade Fe 500 Concrete M20	
(mm)	Beam/Slab Foundation (Tension Member)	Columns / LIFT (Compression Member)
8	450	375
10	600	450
12	700	600
16	900	750
20	1150	900
25	1450	1150
28	1600	1300
32	1800	1450

STRUCTURE CONSULTANTS :

SYAL & ASSOCIATES
(Chartered Engineers,Architects & Project Management Consultants)
ATRIUM 204, PLOT NO. C-204, INDUSTRIAL AREA8-B,SECTOR 74, MOHALI. 160074(PB)
PH 0172-4629234, 5091645

CLIENT:-

PROJECT:-
STANDARD GOVT. VETERINARY DISPENSARY (SBC OF SOIL IS 10t/m2)

REVISION :

S T R U C T U R E

GROUND FLOOR ROOF SLAB AND BEAMS REINFORCEMENT DETAIL

STRUCTURAL CONSULTANT :
SIGNATURE & STAMP:

PROJECT NO:-	2081
DRAWN BY :	Ram Nath
SCALE :	N.T.S
DATE :	13-10-2020
DRG. NO. :	S-104

PRODUCED BY AN AUTODESK EDUCATIONAL PRODUCT
PRODUCED BY AN AUTODESK EDUCATIONAL PRODUCT
PRODUCED BY AN AUTODESK EDUCATIONAL PRODUCT

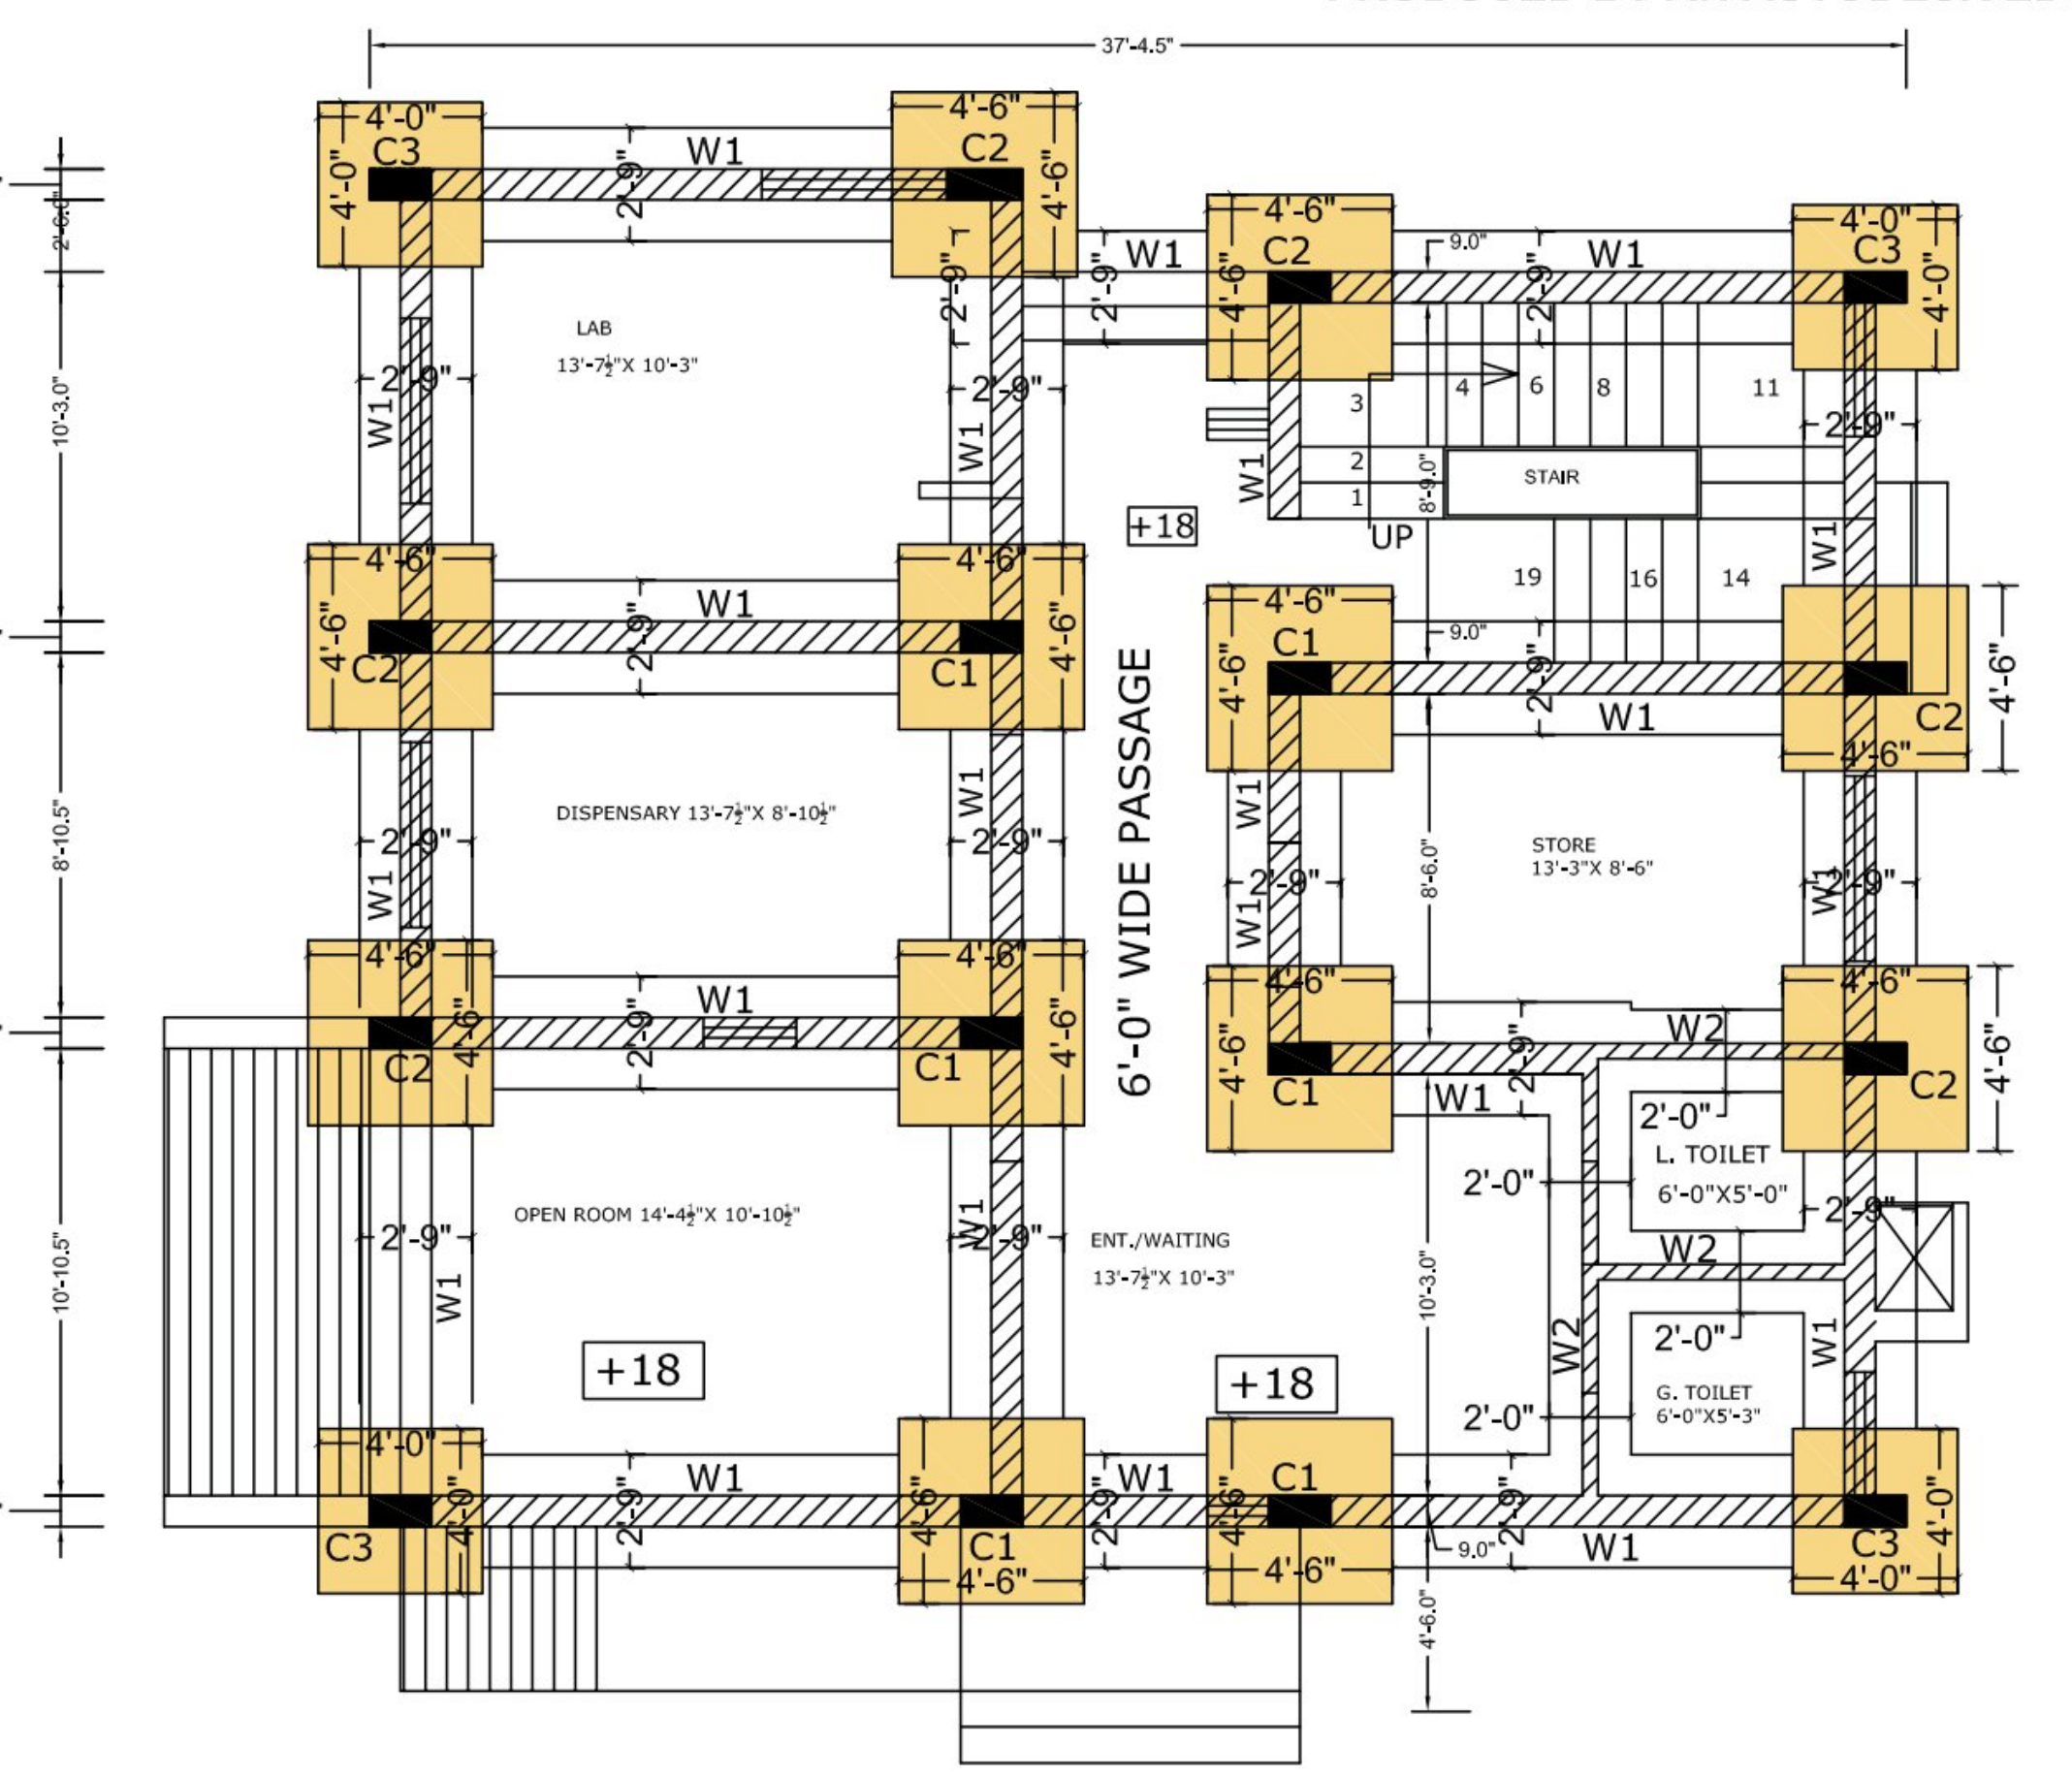

FOUNDATION EXCAVATION KEY & PLAN

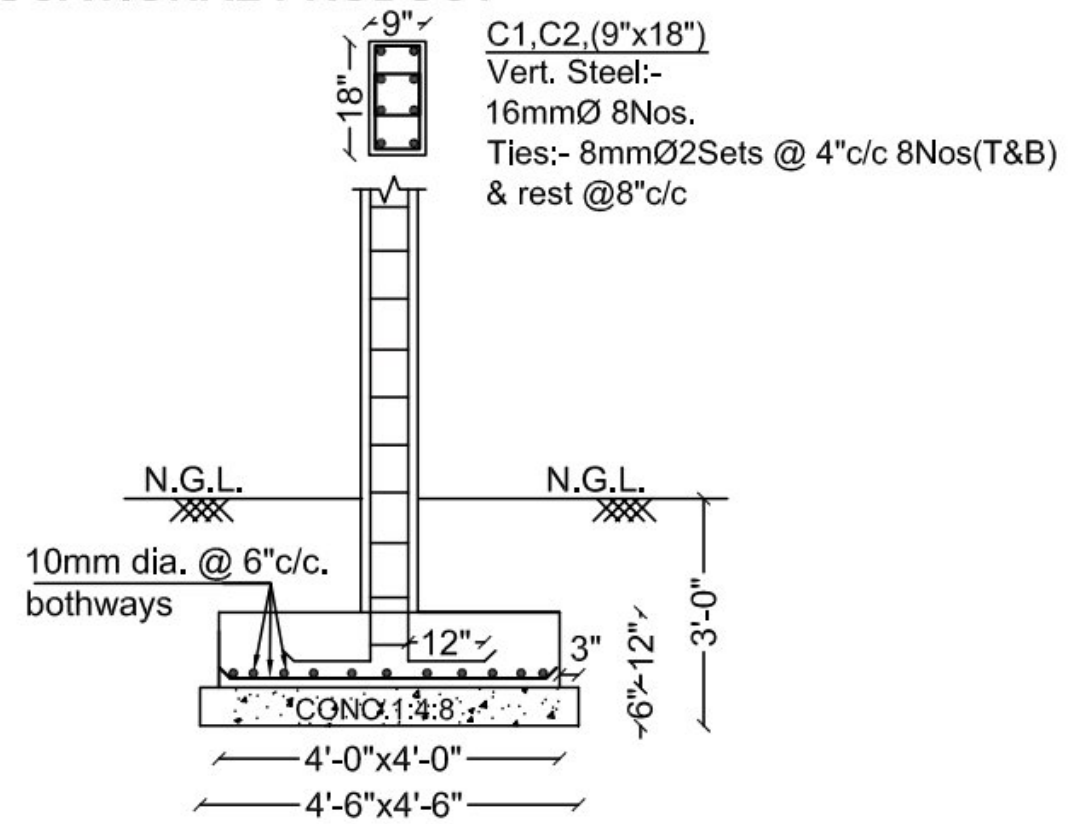

FOUNDATION COL. C1,C2

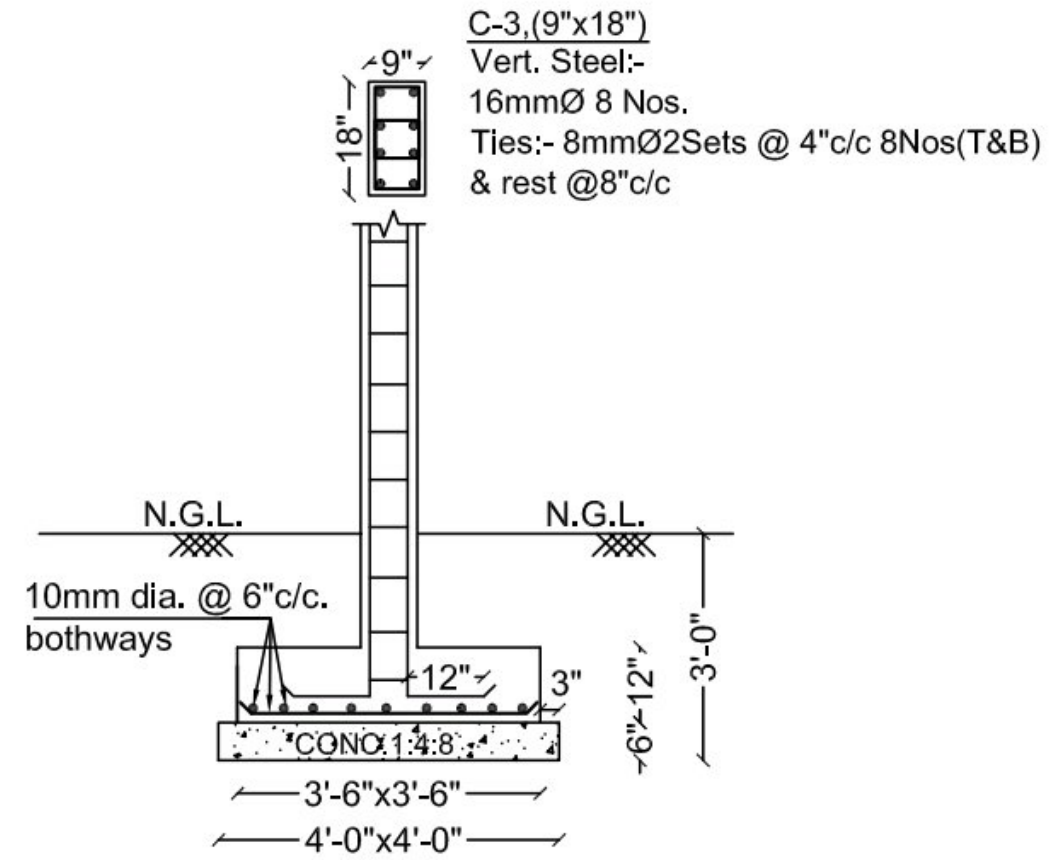

FOUNDATION COL. C-3

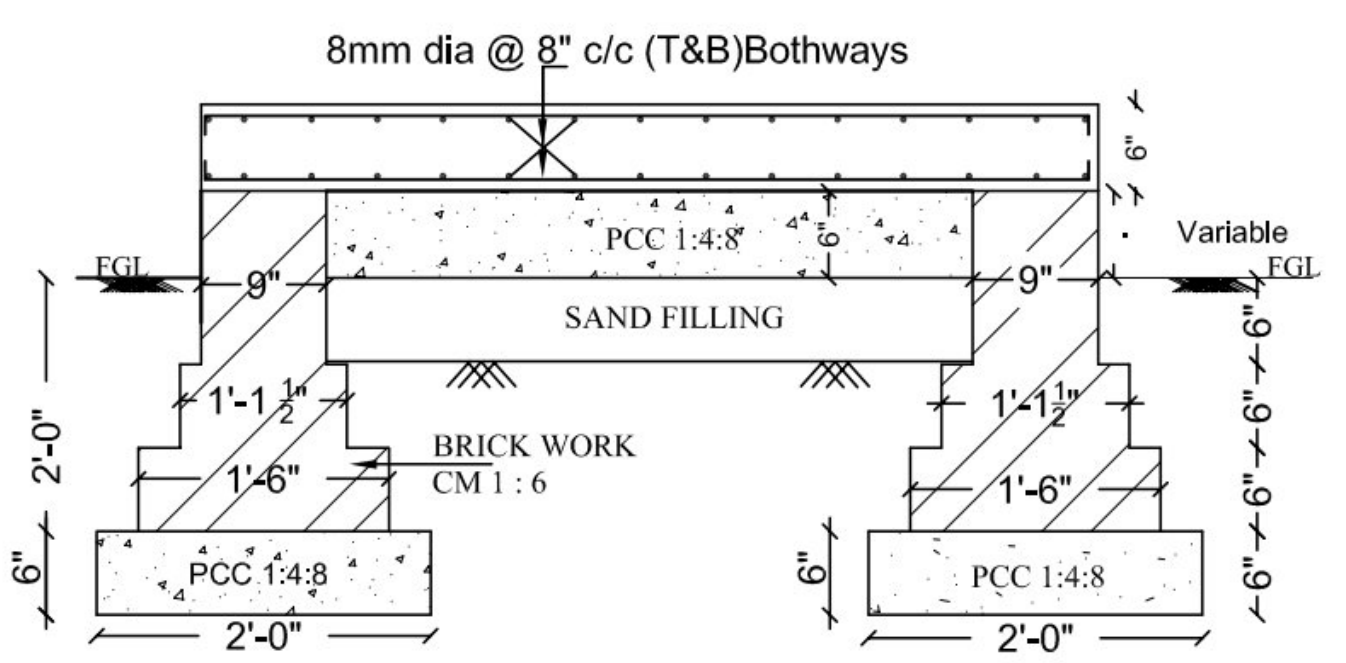

TYPICAL RAMP DETAIL

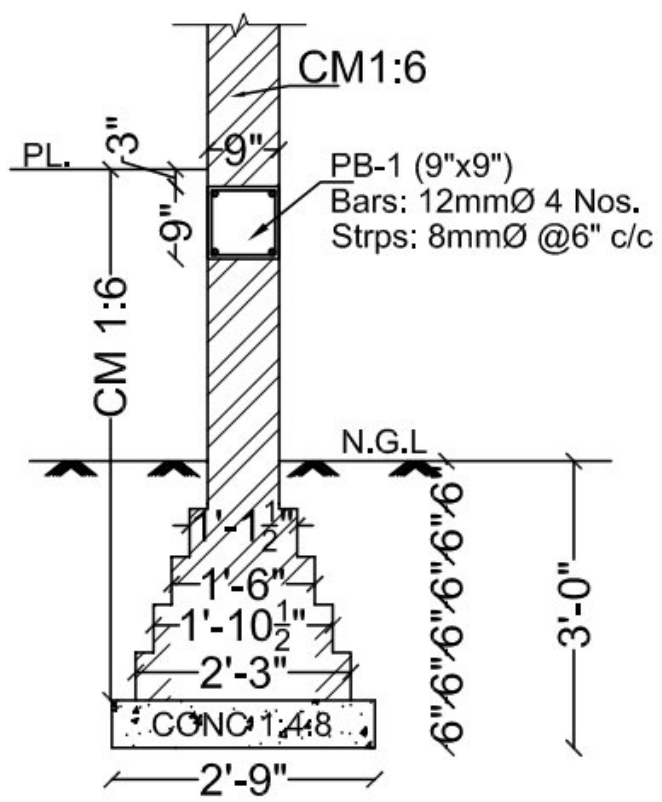

W-1(9" THK WALL)

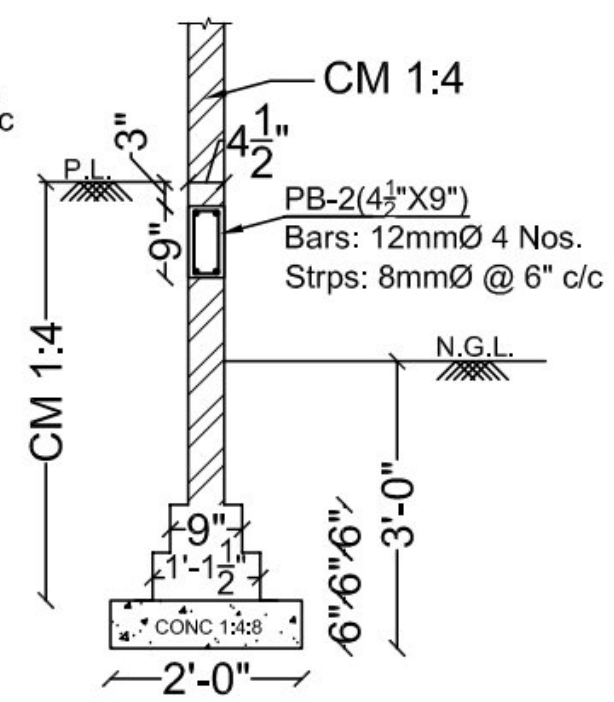

W-2(4½" Thk. Wall)

NOTES

1. DIMENSIONS ARE TO BE READ NOT TO BE SCALED.
2. CONTRACTOR IS TO CHECK ALL DIMENSIONS BEFORE EXECUTION OF WORK.
3. 'Ø' INDICATES THE DIA OF HYSD BARS OF GRADE Fe 500 REFER TO IS: 1786,2008
4. FOR CENTER LINE DIMENSIONS REFER ARCH.DRG'S.
5. NOT MORE THAN 50% BARS ARE TO BE LAPPED AT ONE LOCATION.
6. LAP LENGTH / ANCHORAGE LENGTH:
   (i) 50d IN CASE OF FOUNDATION,BEAM & SLAB
   (ii) 45d IN CASE OF COLUMNS
   WHERE 'd ' IS DIA OF BARS.
7. CLEAR COVER TO REINF.:
   (i) FOUNDATION = 60mm (BOTTOM),30mm(SIDE),25mm(TOP)
   (ii) COLUMN = 40mm
   (iii) BEAM = 30mm
   (iv) SLAB = 25mm
8. EXTRA BARS TO BE EXTEND 0.3L ON EITHER SIDE OF SUPPORTING BEAM OR COLUMN.
9. TOP EXTRA REINF. IN BEAM AND SLAB TO EXTEND 0.3L FROM THE FACE OF SUPPORT (BEAM/COLUMN) WHERE 'L' IS THE EFFECTIVE SPAN OF SLAB/BEAM IN THAT DIRECTION.
10. CONCRETE USED :M-20 (1:1½:3)
11. SBC OF SOIL = 10t/m²

Overlap / Anchorage / Development Length 'L'(mm)

Dia of Bar (mm)	Steel Reinforcement of Grade Fe 500 Concrete M20 — Beam/Slab Foundation (Tension Member)	Columns / LIFT (Compression Member)
8	450	375
10	600	450
12	700	600
16	900	750
20	1150	900
25	1450	1150
28	1600	1300
32	1800	1450

STRUCTURE CONSULTANTS :

SYAL & ASSOCIATES
(Chartered Engineers,Architects & Project Management Consultants)
ATRIUM 204, PLOT NO. C-204, INDUSTRIAL AREA8-B,SECTOR 74, MOHALI. 160074(PB)
PH 0172-4629234, 5091645

CLIENT:-

PROJECT:-
STANDARD GOVT. VETERINARY DISPENSARY (SBC OF SOIL IS 10t/m2)

REVISION :

S T R U C T U R E

GROUND FLOOR ROOF SLAB AND BEAMS REINFORCEMENT DETAIL

STRUCTURAL CONSULTANT :

SIGNATURE & STAMP:

PROJECT NO:-	2085
DRAWN BY :	Ram Nath
SCALE :	N.T.S
DATE :	13-10-2020
DRG. NO. :	S-101

PRODUCED BY AN AUTODESK EDUCATIONAL PRODUCT
PRODUCED BY AN AUTODESK EDUCATIONAL PRODUCT
PRODUCED BY AN AUTODESK EDUCATIONAL PRODUCT