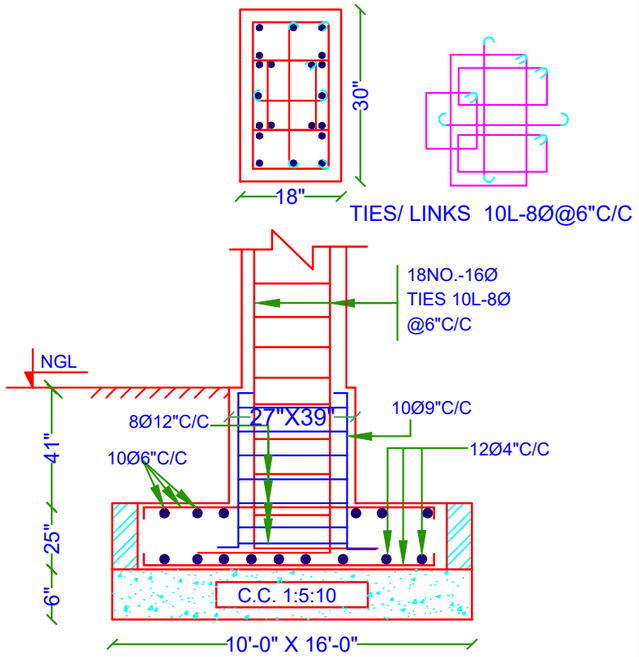

COLUMN C1 = 18" X 30"

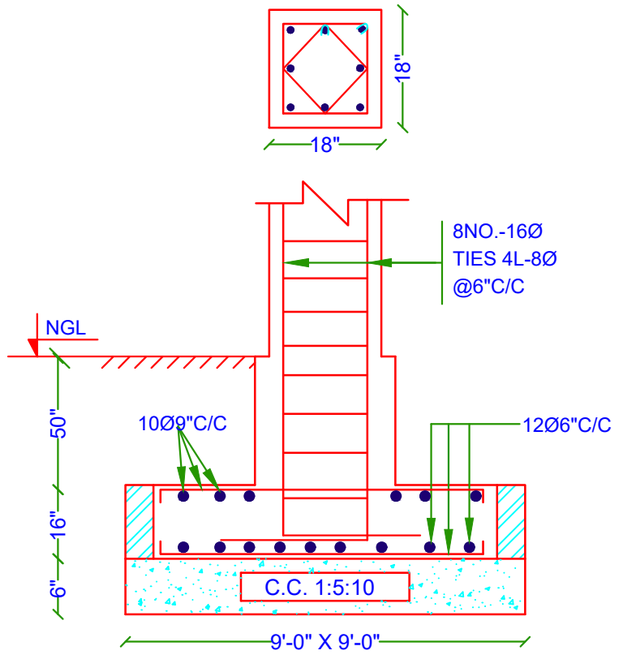

COLUMN C2 = 18" X 18"

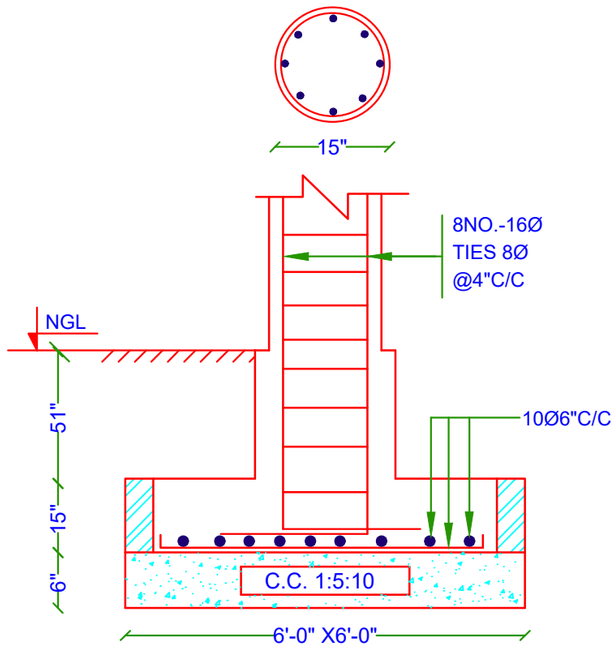

COLUMN C3 = 15" DIA

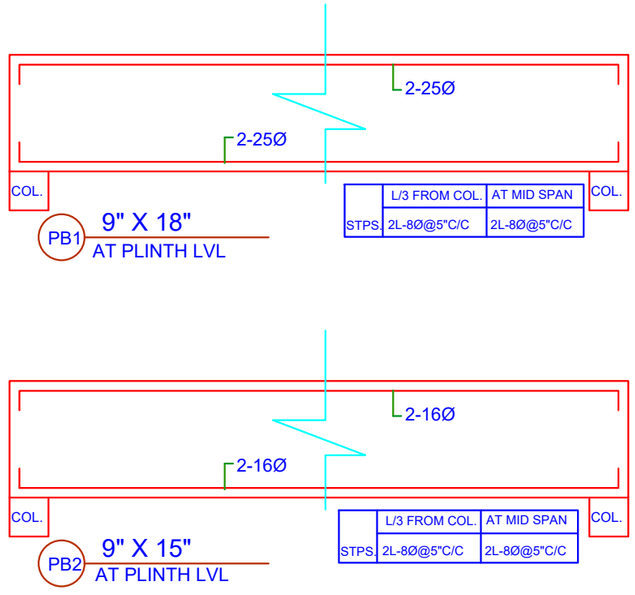

PLAN OF COMMUNITY CENTRE
VILLAGE AASALWASH DUBIYA,
BHIWANI

TITLE:-FOUNDATION DETAIL

DRG NO.

JOB NO:EB/23/6/HR

GENERAL NOTES:-

1. BEARING CAPACITY OF SOIL HAS BEEN ASSUMED 08.00 T/M²
2. GRADE OF CONCRETE M-25(1:1:2)
3. GRADE OF STEEL Fe-500
4. NOMINAL COVER FOR FOOTINGS 60 MM
5. NOMINAL COVER FOR COLUMNS 50 MM
6. NOMINAL COVER FOR BEAMS 25 MM
7. NOMINAL COVER FOR SLAB 25 MM
8. LENGTH OF EXTRA BAR TO BE L/3.
9. STRUCTURE DESIGN IS FOR G.F.ONLY.
10. LAP LENGTH OF STEEL REINFORCING BARS SHALL BE:-

GRADE OF CONC.	LAP LENGTH Fe 500
M-25	48D
M-30	45D
M-35	40D

`D' IS THE DIA OF REINF. BARS

11.STANDARD `L' HOOKS SHALL BE PROVIDED AT THE ENDS OF ALL BARS.

TERRAS GEO STRUCTURES

Er. A.R.Saini
Executive Engineer(Retd.)
Chartered Engineer
Structural Consultant on Panel (HSVP)
Fellow Inst.of Valuers
Contact no :-9896338264

Er. Sandeep Saini
M.tech Civil(Geo-Tech)
Chartered Engineer
Structural Consultant on Panel
(HSVP)

ENGINEERS, BUILDERS,
STRUCTURAL
CONSULTANTS

Institution of Engineers
Regd. No. -AM 162111-7



ENGINEER:S.S

DATE :-
12/07/2022

MODELLING.:P.S

CHECKED BY: A.R.SAINI

SCALE :-NTS